

! WARNINGS AND CAUTIONS

ISSUED 11-2010

REVISED 2010-11-12

WARNING:

- Before beginning the installation, turn off electricity at the circuit breaker box or the main fuse box by switching off the circuit breaker or removing the fuse.

CAUTION:


- These instructions are provided for your safety. It is very important that they are read completely before the installation of your fixture. We strongly recommend that a professional electrician install the fixture.
- We do not warrant that this suggested method of installation satisfies your particular local building codes.
- We recommend that the portion of the post below ground level be coated with an asphalt base paint due to the alkaline condition of various concrete mixes and soils which can react to metallic surfaces and cause corrosion.

INSTALLATION INSTRUCTIONS

STEP 1:

- Dig a hole 12" - 15" in diameter to the depth shown below for specific post length.

POST LENGTH FIT	RECOMMENDED DIRECT BURIAL DEPTH IN.#
7'	18"
8'	18"
10'	24"
12'	24"
14'	30"

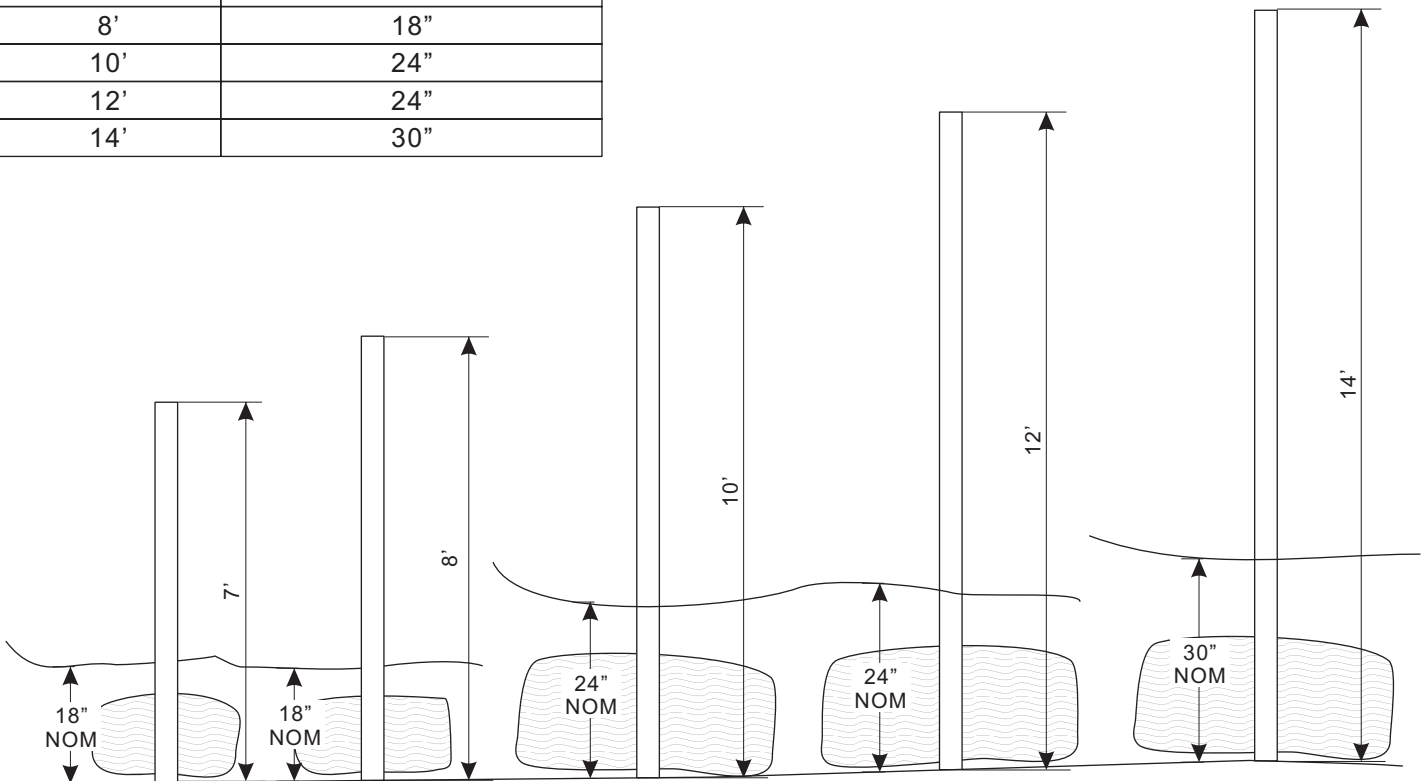

STEP 2:

- a. After consulting local codes, dig a trench to the required depth from the post hole to the power source.

STEP 3:

- a. Shovel several inches of gravel in the bottom of the hole for drainage purposes.

STEP 4:

- a. Insert the underground electrical cable as required from the power source into the inlet hole at the base of the post. Continue feeding the cable through the inlet hole to the top of the post, allowing sufficient leads for splicing purposes. Place the post into the hole at the desired location and stabilize to vertical level position.

STEP 5:

- a. Making sure that the bottom of the post is imbedded in the gravel, pour concrete to just below the wire access hole. Do not pour concrete to ground level. When concrete hardens it should be covered with 4" of soil or sod.

IMPORTANT: scratches or chipped paint caused as a result of abuse or by weed eaters, lawnmowers, etc. and/or the use of certain fertilizers can cause corrosion to steel or aluminum posts.