




ASSEMBLY INSTRUCTION MODEL # 537-SA



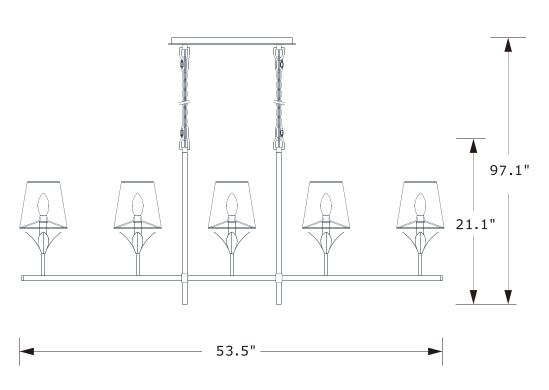

All electrical components must be installed by a licensed electrician in accordance with the National

Electric Code and the appropriate

local electrical codes.






You will need 5 -Candelabra Base Bulb 40 Watts Recommended 60 Watts Max. USE LED BULBS FOR EXTENDED USE THIS FIXTURE IS DAMP RATED

How to Install

- 1.Screw two top stems onto the frame.

 Make sure the loop faces the same direction on both stems.
- 2.Screw two bottom stems onto the frame.
- 3.Place the mounting plate over the outlet box and mark two points on the ceiling with the same distance as between the the two holes on the mounting plate.
- Drill holes at the marked points then insert the plastic anchors into the holes. Attach the mounting plate onto the ceiling using the anchor screws.
- Decide the preferred hanging height and choose the correct length of chain needed.
- Raise the fixture up to the ceiling and do the wire connections. Secure the canopy with the screws.

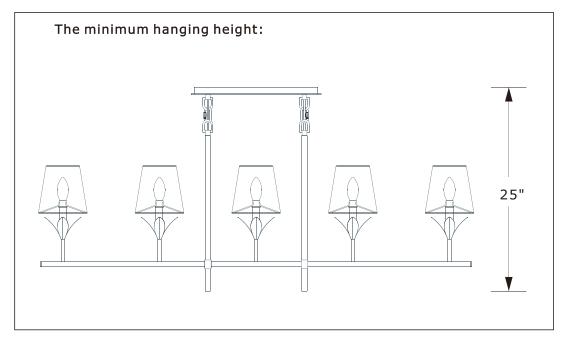

WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov.





PART NUMBER MODEL # 537-SA

Part Number A.(1)-Mounting Hardware Outlet box-B.(1)-Canopy(L16",W5.1",H0.9") #XRE537SACAN16IN C.(4)-Loop D.(4)-Quick Link E.(2)-Hanging Chain(72",4.0mm) #XRE514SACHA4.0MM F.(2)-Top Stem(15.3",15.3mm) #XRE537SASTEM15.3IN G.(2)-Bottom Stem (2. 8"15. 3mm), #XRE537SASTEM2.8IN H.(5)-White Fabric Shade #XRE531SHA6IN I.(5)-Candle Sleeve(W0.87",H3.9") #XRE516SACDL3.94IN J.(2)-Final #XRE537SAFIN D-- H Ι ф J \$