

NEX-730-LED

LED Exit and Emergency Combination with Adjustable Heads

Source: 2.8W normal operation

3.5W emergency operation

PRODUCT DESCRIPTION

LED exit sign with dual emergency fixture features a ball & socket for full adjustability. Exit sign is powered by LED source for maximum life without maintenance; emergency fixtures utilize high performance. In the event of power loss, both sign and heads will operate for a minimum of 90 minutes.

FEATURES

- Fully adjustable 2.8 watt high-intensity LED heads.
- Universal Mounting - Wall or ceiling
- UL Listed and meets or exceeds UL924, NEC, OSHA and NFPA 101 Life Safety Code requirements
- Injection molded high impact and scratch resistant corrosion-proof and UL94 5V-0 flame retardant housing.
- Push-To-Test Switch
- Maintenance free NiCad battery
- 120 or 277 VAC input
- Field selectable Chevrons
- 6" High and 3/4" Stroke letters
- External LED Status indicator
- Available in Black or White
- 100,000 hour expected life
- Wet Location shield accessory available

ELECTRICAL

Voltage: 120V or 277V Input

Wattage: 2.8 Watts, normal operation. 3.5 Watts, emergency operation

Light Source:

Exit: LED strip for normal operation

Emergency: LED Strip and 2 wedge base LED lamps

Battery: 4.8V Replaceable 1.0Ah Ni-Cad battery operates integral heads and exit LED sources. 90 minute emergency operation Internal solid state charging circuit

BODY

- Injection-molded dual housing

FACE

- Single or dual configuration. Optional solid face panel is included.
- 6" high text with color diffusion
- Knockout directional chevrons

EMERGENCY

- Two adjustable Balls & socket with round heads holding self-protected, covered LEDs
- Emergency heads can be mounted on top or bottom of exit sign

MOUNTING

- Wall or Ceiling
- Mounting hardware included

TESTING

- High-charge/ready operation indicator light
- Test button
- Isolated surge/short circuit protection

WET LOCATION / VANDAL RESISTENT ENCLOSURE

An enclosure for wet locations and vandal resistant is available, must specify NEG-60.

LABELS AND LISTINGS

UL Listed for Damp locations



Type

Project

Catalog No.


Notes

PRODUCT IMAGES AND DIMENSIONS




NEX-730R

Exit & Emergency Combo with Red Letters & White Housing

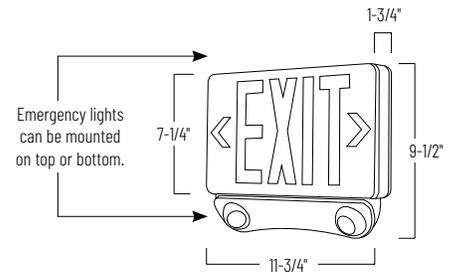

NEX-730R / NEG-60

Exit & Emergency Combo with Wet Location Enclosure



LED Exit and Emergency Combination with Adjustable Heads

Description	Letter Color / Housing Color
NEX-730-LED = Battery Backup	/G = Green Letters / White Housing
	/GB = Green Letters / Black Housing
	/R = Red Letters / White Housing
	/RB = Red Letters / Black Housing

Wet Location Enclosure

Description
NEG-60 = Wet Location Enclosure

Example: **NEX-730-LED/R** = LED Exit and Emergency Combination with Adjustable Heads, Red Letters / White Housing