

Collection: Kason

Installation manual for:


LD5032D36BK L36"*W8. 2"*H15"L3

Installation instructions:

- 1.Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 3."E" wire from the fixture is attaced to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 4. Secure mounting bracket to the junction box.
- 5.Insert screws(P2) in side of top unit the mounting bracket.
- 6.Install the top plate (05) on the hanging plate (01) with the (04) screw.
- 7. Install the glass cover (09) on the lamp cap, hold it with the iron piece (10) and lock it with the outer ring (11).
- 8.Install the bulbs(not included) into the lamp fixture.

PARTS LIST

The end!

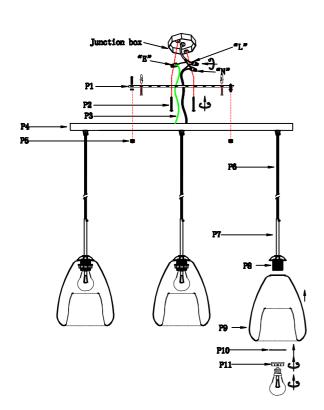

" L"	=	Hot wire
"N"	=	Neutral wire
"E"	=	Ground wire

IMIO LIGI							
part	picture	Description	Qty	Check list			
P1		L17.3" Mounting bracket	1				
P2		5/32-32 Screw	2				
P3	\	ground wire	1				
P4		<pre>031.9"*5.9*H1 canopy plat</pre>	1				
P5	•	Nut	2				
P6	~	Power Cord 79" SPV Black	3				
P7			3				
P8	Ê	E26 socket	3				
P9	<u>A</u>	ø8. 2″≠H9. 5″Glass	3				
P10		Iron sheets	3				
P11		Outer ring	3				
P12							
P13							
P14							
P15							
P16							
P17							
P18							
P19							