

LIVING DISTRICT

Collection: Phineas












Installation manual for:

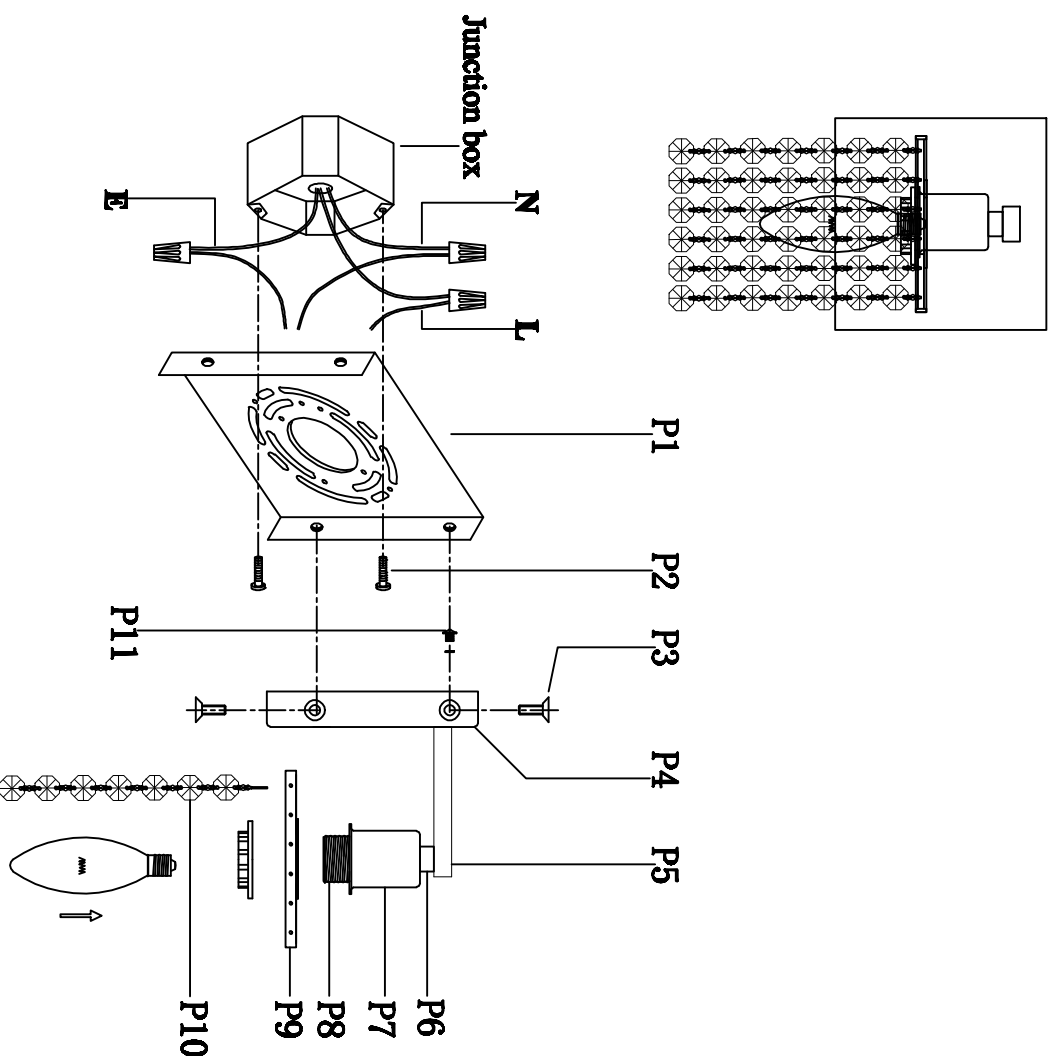
LD7006BR W4.8"*H8.4"*E5.8" L1

Installation instructions:

1. Black wire from ceiling(junction box) attaches to "L" wire from the fixture.
 2. White wire from ceiling(junction box) attaches to "N" wire from the fixture.
 3. "E" wire from the fixture is attached to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
 4. Secure mounting bracket to the junction box.
 5. Insert screws (P2) in side of top unit the mounting bracket(P1).
 6. Lock the lamp body on the mounting bracket (P1) on the wall with a flat head screw (P3)
 7. Hang Crystal(P10)
 8. Install E12 light source.(Bulb not supplied)
- The end!

PARTS LIST

Part	Picture	Description	Qty	Check list
P1		U-shaped hanging board (L4.33"*W4.33"*H0.59")	1	
P2		Mounting bracket screw	2	
P3		Flat head Screw	4	
P4		Square box (L4.8"*#4.8"*#10.8")	1	
P5		Lamp arm (0.39"*#0.79"*#1.335")	1	
P6		Cylindrical iron (#0.55"*#10.31")	1	
P7		Anti-edge light cup (#1.58"*#1.58")	1	
P8		E12 card type full tooth lamp head	1	
P9		Flat iron frame (L3.94"*#3.94"*#10.28")	1	
P10		Octagonal beads	24	
P11		M4 screw	2	



"L" = Hot wire

"N" = Neutral wire

"E" = Ground wire