Collection:

Installation manual for:

**LDOD4008** W4.50" H17.38" E2.88" L2

**Installation instructions:**

1. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
3. "E" wire from the fixture is attaced to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
4. Secure mounting bracket to the junction box.
5. Insert screws (P2) in the side of the mounting bracket(P1).
6. Align the holes on the side of the base(P3) and secure with the screw (P4)

The end!

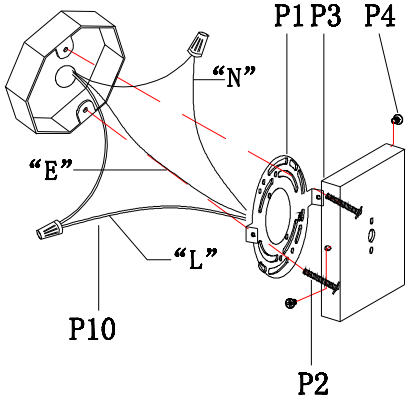


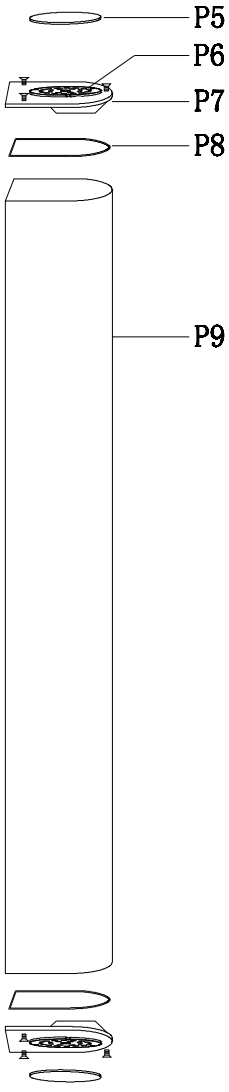


"L" = Hot wire
"N" = Neutral wire
"E" = Ground wire

## PARTS LIST

| Part | Picture | Description | Qty | Check list |
|---|---|---|---|---|
| P1 | | Mounting bracket | 1 | |
| P2 | | 5/32-32 screw | 2 | |
| P3 | | Base | 1 | |
| P4 | | Screw | 2 | |
| P5 | | Glass | 2 | |
| P6 | | LED 3000K | 2 | |
| P7 | | Cover | 2 | |
| P8 | | Silicone rubber | 2 | |
| P9 | | Aluminum pipe | 1 | |
| P10 | | Power wire 8" E327219 18AWG BLACK/WHITE | 1 | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |