


XENO™ WET

FP6729B
Ceiling Fan**

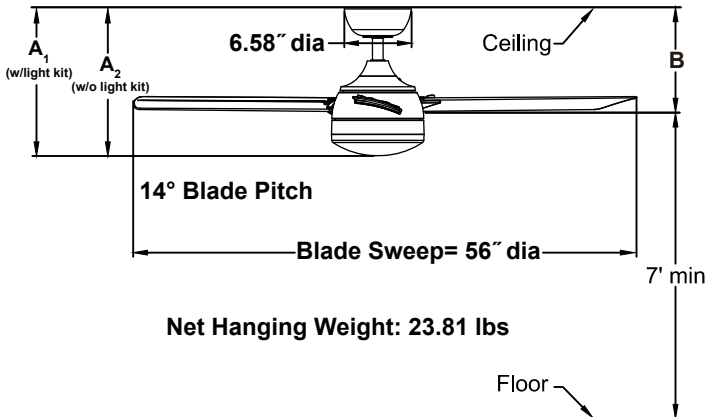

	A ₁	A ₂	B
Fan w/4.5" downrod	14.54"	14.54"	10.24"
Fan w/12" downrod	22.04"	22.04"	17.74"
Fan w/18" downrod	28.04"	28.04"	23.74"
Fan w/24" downrod	34.04"	34.04"	29.74"
Fan w/36" downrod	46.04"	46.04"	41.74"
Fan w/48" downrod	58.04"	58.04"	53.74"
Fan w/60" downrod	70.04"	70.04"	65.74"
Fan w/72" downrod	82.04"	82.04"	77.74"

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

188 x 25 AC motor is designed for optimal performance with this fan.

BLADES:

A set of three 24.5" composite blades is included.

LIGHTING OPTIONS:

One 18-watt LED included.

CONTROL OPTIONS:

TR500 hand-held remote control is included. Push button remote control with variable fan speeds, infinite light levels and off button. Optional CWRL4**, WC2WH and WR501WH wall controls, BTRC9, CRL4WH hand held remote controls and BTR9 and WFR50 receiver are available—sold separately. Instructions are provided with each control.

DOWNROD OPTIONS:

Fan comes with 1" dia. x 4.5" long wet-location downrod (DR1SS-45). Optional wet-location downrods are available in 12", 18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 27°. Most sloped ceiling installations require a downrod longer than the standard 4.5" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 27° and up to 42°. Optional close-to-ceiling kit is available as well—sold separately. Call technical support for more information.

LOCATION USE:

Fan is rated for dry, damp and wet locations.

Available Finish

BLW	Black with Dark Black Blade
DZW	Dark Bronze with Dark Bronze Blade
MWW	Matte White with Matte White Blade
SLW	Silver with Silver Blade

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	190	6475	116	0.47	56
Med	119	4252	152	0.33	28
Low	83	2622	194	0.23	14

Energy Guide FTC

Power (W _{ave})	Total Air Delivery (CFM _{ave})	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
36	4669	10	130

Light Bulb Information (120V)

Bulb Type	Watts	Lumens Amount	Color Temp	CRI
LED	18	1400	3000	90%