


CAST ALUMINUM BRACKET ARM SECURES TO TUBING W/(1) 1/4-20 S.ST'L. SET SCREW.

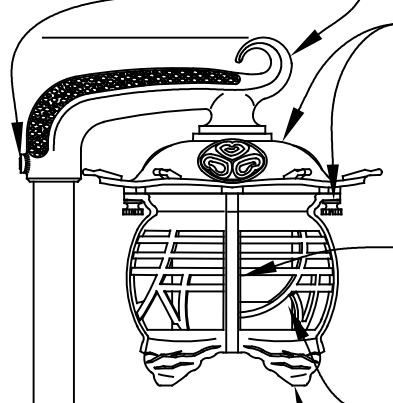

CAST ALUMINUM ORIENTAL ROOF SECURES TO CAGE ASSEMBLY WITH (2) 8-32 BRASS THUMBSCREWS. TO RELAMP, REMOVE THUMBSCREWS.

WEDGE BASE SOCKET WITH 18 WATT LAMP AND 4 FEET OF #18-2 LOW VOLTAGE CABLE SUPPLIED.

2 1/2" DIA. X .125" WALL X 3 3/4" LG. WHITE ACRYLIC TUBING.

2 PC. CAST ALUMINUM WELDED ORIENTAL CAGE WITH OPEN BOTTOM.

1/2" SCHEDULE 40 X 24" LONG ALUMINUM TUBING.

8 1/2" LONG LOW VOLTAGE BLACK ABS FEMALE GROUND SPIKE WITH #8 S.ST'L. SCREW.

LOW VOLTAGE CABLE CONNECTOR TO BE USED WITH HANOVER LANTERN #10, #12, #14, OR #18 LOW VOLTAGE CABLE.

LANTERN WILL BE PREWIRED AND TESTED. ELECTRICAL COMPONENTS ARE U.L. LISTED. ALL MOUNTING HARDWARE SUPPLIED.

Drawing for illustration only - scale approximate

25 1/8"

8 1/2"

HEIGHT	25 1/8"
WIDTH	6 1/4"
PROJECTION	
TOP TO OUTLET	

TITLE: TERRALIGHT "LONG LIFE" LOW VOLTAGE LANTERN

SCALE: 1=4	DATE: 02/10/20	DWG BY: ATV
------------	----------------	-------------

DWG. NO. LVW191