

INSTALLATION INSTRUCTIONS

For Model # GKMP11-084&467

(Rev. 11/24/2009)

IMPORTANT WARNING : FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.

HANGING THE FIXTURE (Fig. 1)

1. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
2. Shut off power at the circuit breaker and remove old fixture including the mounting hardware.

CONNECTING THE WIRES (Fig. 2)

3. Take the power supply and tear the paper off the twin adhesive, then stick power supply (C) into the Circular Strap, make sure it be stuck tightly.
4. Attach the Circular Strap (E) to the Outlet box in the ceiling with two screws (B). The side of the Circular Strap marked "GND" must face out.
5. At this point, connect the electrical wire as shown in figure 2, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixtures Ground Wire to it. Otherwise, connect the fixture Ground Wire directly to the crossbar using the Green Screw provided.
6. Place the Canopy (A) over the Circular Strap (E). Adjust the Canopy (A) and let the Studs (D) slide into the slot of Canopy (A). Tighten the Studs (D).

Your installation is now complete. Return power to the junction box and test the fixture.

Fig. 1

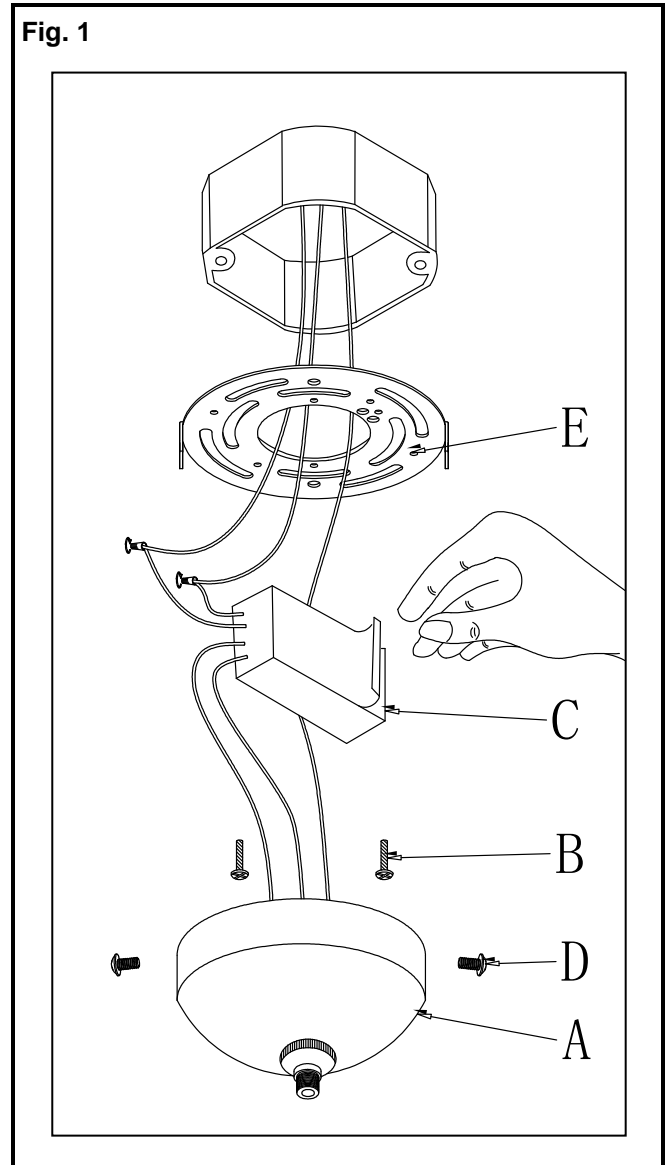


Fig. 2

