

INSTALLATION INSTRUCTIONS

For Model # P254-084 (Revised 05/11/2013)

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.


WARNING

- Risk of shock, do not plug in the unit before assembly.
- Do not exceed the maximum wattage rating. (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)

MOUNTING THE LUMINAIRE, PLUG VERSION (Fig.1) For hardwire go to Fig.2

1. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
2. Remove the bare ground wire inside canopy(F) by cutting off at connection point with a wire cutter.
3. Put the Screw (B) into the screw hole of Circular Strap (A-1)(**the circular strap with only eight holes**). The side of the Circular Strap marked "GND" must face out.
4. Secure the screw nut (C) onto the Screw(B) tighten.
5. Secure Circular Strap(A) to the mounting wall by two Screws (D) through the plastic anchor(E) tightly
6. Install the cord cover pipe(F) and secure it on the Fixture Body(G) with Lock Tooth Washer(H), Screw Nuts(I) by the provided Wrench(J) tightly.
7. Place Fixture Body (G) over the Circular Strap (A) then secure them tightly with two Screw Studs (K) by screwdriver.
8. Insert the Cord Cover Pipe(L) into the Cord Cover Pipe (F) and secure them tightly.
9. Install halogen bulb(M) into socket in accordance with the fixture's specifications. **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

Fig. 1

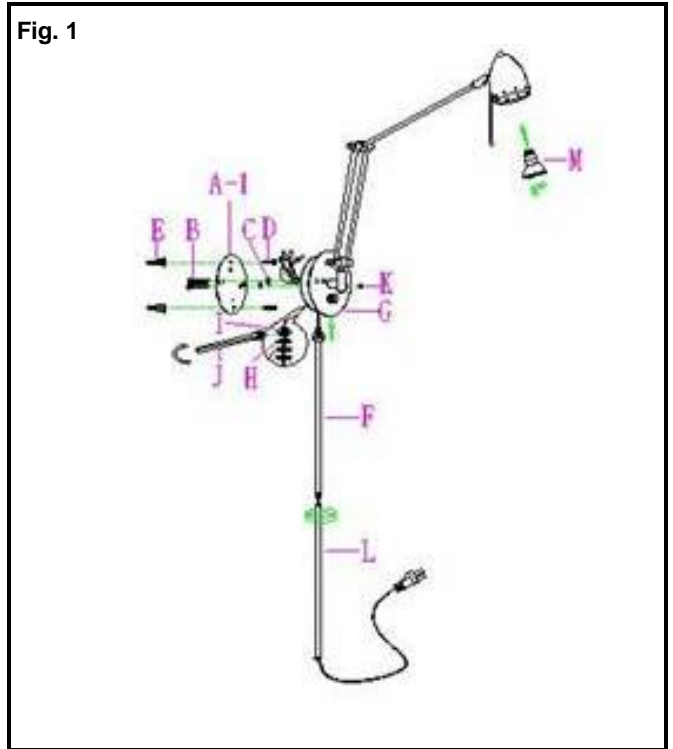

INSTRUCTIONS PERTAINING TO A RISK OF FIRE
ELECTRIC SHOCK, EXPOSURE TO EXCESSIVE
UV RADIATION, OR INJURY TO PERSONS.

IMPORTANT SAFETY INSTRUCTIONS

Lighted lamp is HOT!

WARNING: In handling of halogen bulb, care should be taken not to touch it with your bare hands. Oil residue will shorten the life of the halogen bulb. If you accidentally come in contact, wipe thoroughly with a clean, lint-free, cotton cloth. Allow the bulb to cool for 10 minutes before changing the bulb.

**WARNING – TO REDUCE THE RISK OF FIRE,
ELECTRIC SHOCK, EXPOSURE TO EXCESSIVE
UV RADIATION, OR INJURY TO PERSONS:**

1. Turn off/unplug and allow to cool before replacing bulb.
2. Bulb gets HOT quickly! Only contact switch/plug when turning on.
3. Do not touch hot lens, guard, or enclosure.
4. Do not remain in light if skin feels warm.
5. Do not look directly at lighted lamp.
6. Keep lamp away from materials that may burn.
7. Use only with a 50 watt or smaller bulb.
8. Do not touch the bulb at any time. Use a soft cloth. Oil from skin may damage bulb.
9. Do not operate the portable luminaire with a missing or damaged guard, lamp containment barrier, or UV filter.

MOUNTING THE FIXTURE, HARDWIRE VERSION (Fig.2)

1. Shut off power at the circuit breaker and remove old fixture from wall, including the crossbar.
 2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
 3. Remove the cord and plug by disconnecting the wire nuts to the cord.
 4. Put the Screw (B) into the screw hole of Circular Strap (A-2)(**the circular strap with hollow**). The side of the Circular Strap marked "GND" must face out.
 5. Secure the screw nut (C) onto the Screw(B) tighten.
- Put two Screws (D) into the screw hole of Circular Strap (A). Attach the Circular Strap(A) to the outlet box with two Outlet Box Screws (D).

CONNECTING THE WIRES (Fig. 3)

6. Connect the electrical wires as shown in Fig. 2, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's Ground Wire to it. Otherwise, connect the fixture's Ground Wire directly to the Circular Strap by using the Green Screw provided.

FINISHING THE INSTALLATION (Fig. 1)

7. Place Fixture Body (G) over the Circular Strap (A) then secure them tightly with two Screw Studs (K) by screwdriver.
8. Insert plug (L) into hole in Fixture Body (G).
10. Install halogen bulb (M) into socket in accordance with the fixture's specifications. **DO NOT EXCEED THE MAXIMUM WATTAGE RATING. (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

Your installation is now complete. Return power to the outlet box and test the fixture.

IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.

