
MP28356 Specification Sheet

Multi Pendant



| PROJECT | | | | | | | |
|---------|------|---------------|---------------------|---------------------|--|--|--|
| DATE | | | ТҮРЕ | | | | |
| Voltage | Watt | LED Lumens | Delivered Lumens | Finish(es) | Color Temp CRI(Ra) Dimming Rated Life | 3000K >90 100%-10% 50,000 hours | |
| 120V | 90W | 7980lm | 2660lm* | BK - Black | | | |
| 120V | 90W | 7980lm | 2380lm* | BN - Brushed Nickel | | | |
| 120V | 90W | 7980lm | 3060lm* | GD - Gold | | | |
| 120V | 90W | 7980lm | 3660lm* | WH - White | | | |

*Preliminary figures



GD - Gold


WH - White BN - Brushed Nickel

Product Descriptions

Square profile linear aluminum frames with thin cables Inset opal polymeric diffuser Finely textured plate or powder-coat finish.

Product Details

High system efficacy. Low total life cycle cost. ETL Listed. 5-years warranty. Complete warranty terms located at: www.kuzcolighting.com/warranty Utilizes our LED Driver Light Engine. LED Driver within canopy. Up and down light distribution. Max. cable length of 120". Dimmable with ELV or TRIAC dimmer (not included) Custom options available.

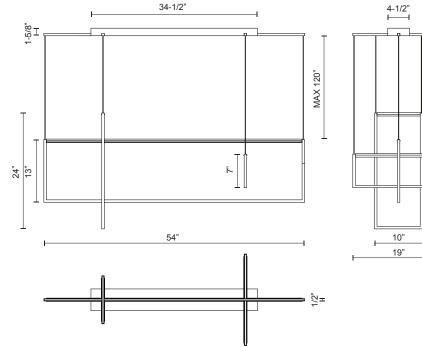

L: 34-1/2"; W: 4-1/2"; H: 1-5/8"

Comments:

19054 28th Avenue Surrey, BC, Canada V3Z 6M3 20190109

T: 604 538 7162 F: 604 538 7196 W: Kuzcolighting.com

Canopy dimensions:

