PD22339

Specification Sheet


Pendant




PROJECT		_	
DATE	TYPE		

/oltage	Watt	LED Lumens	Delivered Lumens	Finish(es)	Color Temp CRI(Ra) Dimming Rated Life
120V 120V 120V	94W 94W 94W	5850lm 5850lm 5850lm	3600lm* 4050lm* 5400lm*	BK - Black BN - Brushed Nickel WH - White	

*Preliminary figures

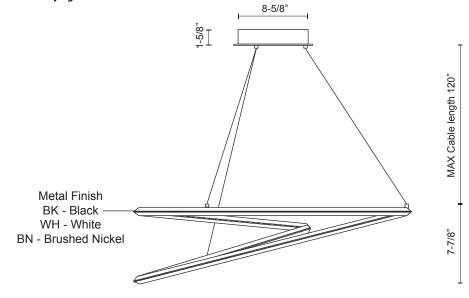




Product Descriptions

Extruded and rolled triangular aluminum loop Flexible silicon rubber diffuser Plated and brushed finish or matte powder-coat Up and down light Max. cable length of 120".

Product Details

Custom options available.

High system efficacy. Low total life cycle cost. ETL Listed.
5-years warranty.
Complete warranty terms located at: www.kuzcolighting.com/warranty
Utilizes our LED Driver Light Engine.
LED Driver within canopy.
Dimmable with ELV dimmer (not included)

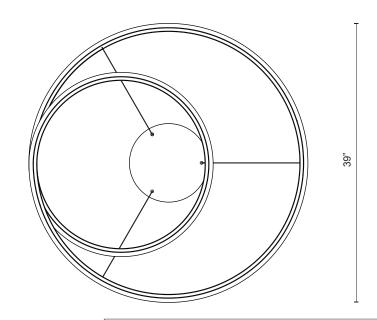

Comments:

Canopy dimensions: D8-5/8"x H1-5/8"



T: 604 538 7162 F: 604 538 7196 W: Kuzcolighting.com



3000K >90 100%-10% 50,000 hours