PD80730

Specification Sheet

Pendant Lamp

Voltage	Watts	LED Lumens	Delivered Lumens	Finish(es)
120V	63W	6300lm	4800lm*	WH - White

DC LED DRIVER INFO	Watt	Voltage	Current
	72W MAX	30-40V	1750 mA

Color Temp 3000K
CRI (Ra >90
Dimming 100% - 10%
Rated Life 50,000 hours

*Preliminary figures

8-5/8"

Metal Finish
WH - White

1-5/8"

Braided Coax
Wires

120" MAX

White Polymeric
Diffuser
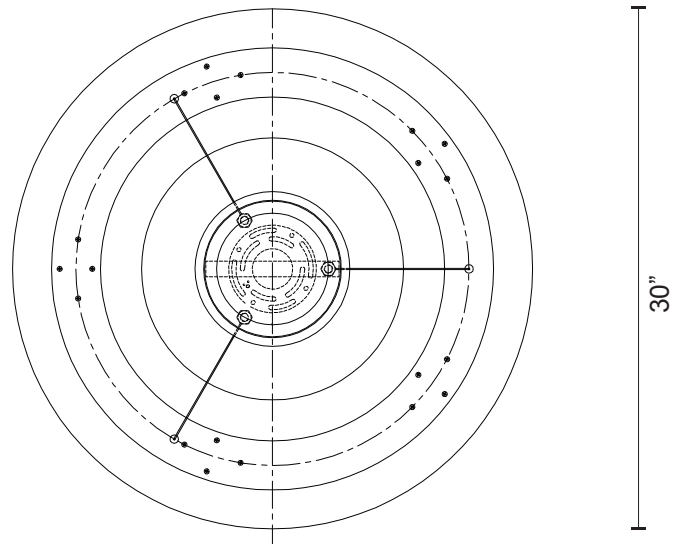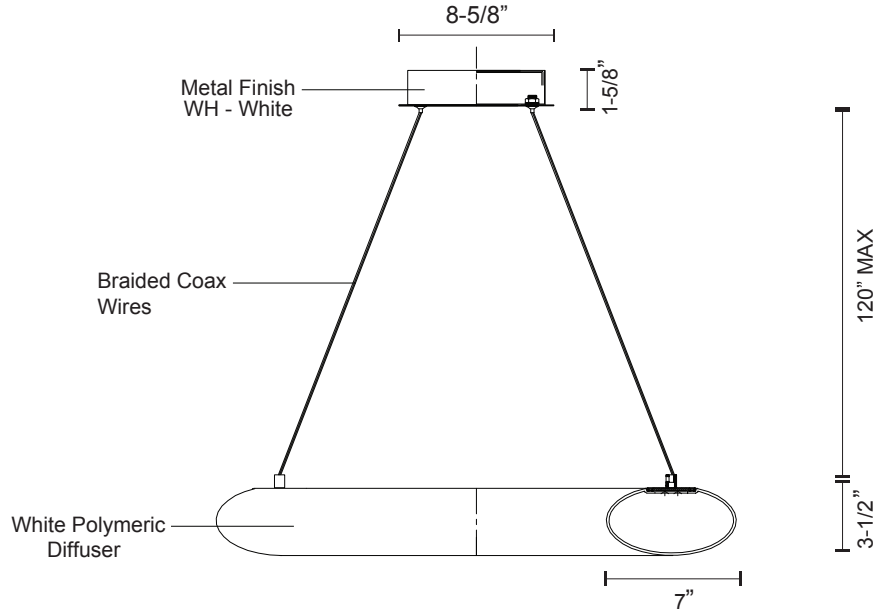
3-1/2"

7"

30"

Product Descriptions

A radiant torus of bright, even illumination. Available in a variety of sizes and as either a pendant or flush mount, these halos of light adapt to any setting. Eternal and substantial.

Product Details

High system efficacy
Low total life cycle cost
ETL Listed
1-year fixture warranty and 5-year LED board warranty.
Complete warranty terms located at:
www.kuzcolighting.com/warranty
DC Driver in canopy
Available in white metal finish with a white polymeric diffuser. 120" Max wire length.
Braided coax wires.
Dimmable with Triac Dimmer (not included)
Custom options available

Fixture Weight: 9.3lb

Canopy dimensions:
D: 8-5/8" H:1-5/8"

Comments:

KUZCO
LIGHTING

20170710

19054 28th Avenue
Surrey, BC, Canada
V3Z 6M3

T: 604 538 7162
F: 604 538 7196
W: Kuzcolighting.com

ETL Listed
Intertek