

Features _

- Perfect for clinical applications
- *1.28 or 1.6 Gpf / 4.86 or 6.05 Lpf low water consumption*
- 1-1/2" top spud for flush valve installation that accommodates many brands of flush valves
- High performance, high efficiency (HET)
- The Mansfield® Limited lifetime warranty
- Available in White only



Components ___

| Model # | Description | Codes/Standards |
|---------|-------------|-----------------|
| | | |

Wall-mount, rear outlet, elongated front toilet bowl. Includes a 1-1/2" top spud for flush valve installation. Less carrier mounting system, wall bolts, caps, toilet seat and flush valve.





(*When using the proper 1.28 flushometer)




Specifications

| Model # | Description | Codes/Standards | |
|---------|--|-----------------|--|
| 1301 | Wall-mount, rear outlet, elongated front (*1.28 or 1.6 Gpf) toilet bowl. Includes 1-1/2" top spud. | HET ADA | |

| Specification | Description | Specification | Description |
|----------------------|------------------------------------|-----------------|---|
| Material | Vitreous China | Trap Diameter | 1-7/8" |
| Water Pressure Range | 20 to 80 PSI | Trap Seal | 2-1/8" |
| Flush System | Siphon Jet Technology | Rough-in | Rear Outlet |
| Water Usage | 1.28 or 1.6 Gpf / 4.84 or 6.05 Lpf | Shipping Weight | Model 1301 - 54 lbs. (25 kg) |
| Water Surface Area | 8-1/2" x 10-1/2" | | |
| MaP Rating | 1,000 grams | Warranty | Vitreous China - Limited Lifetime Tank Trim - Limited One Year |

Technical Information

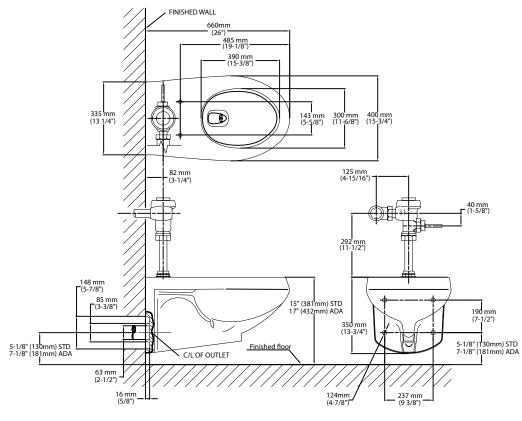

See our complete line of acrylic and vitreous china bathroom fixtures, plastic tank trim and plumbing products.

These dimensions are nominal and are subject to change without prior notice.

Fixture performance and specifications meet or exceed, ASME A112.19.2-2008/CSA B45.1-08 standards, and other state and local codes.

Engineered to dramatically meet or exceed all ANSI weight/load bearing requirements.

Meets or exceeds American Disabilities Act and ANSI A.117.1 requirements where installed so top of rim is 17" (432 mm) from the finished floor.