382-376RH SUMMIT® PRO

MANSFIELD®

Elongated Front, Vitreous China, Two-Piece Toilet

FEATURES

- High performance MagnaFlush™ flushing technology
- SmartFasten™ 3-bolt tank-to-bowl connection
- 1.6 gpf / 6.0 lpf low water consumption
- · Elongated front bowl
- · PuraClean® easy-to-clean glaze
- Fluidmaster® pilot operated anti-siphon fill valve
- 3' Rigid Flapper flush valve requires less force to flush, is more consistent and uses a simple universal repair part/seal
- · Model 59RH color match, metal trip lever
- 12' rough-in
- · 2' glazed trapway
- The Mansfield® limited lifetime warranty on china, Five-year limited warranty on tank trim
- · Available in White



COMPONENTS

MODEL #	DESCRIPTION	CODES/STANDARDS	
382-376RH	Elongated front, two-piece toilet. Less toilet seat and supply.	d front, two-piece toilet. Less toilet seat and supply.	
382	Elongated front toilet bowl only. Less toilet seat and supply.		
376RH	Tank and cover only, with right hand, front-mount, color match, metal trip lever. Less supply.	c ®	
TANK TRIM & REPLACEMENT PARTS			
59RH	Trip lever - color match, metal trip lever, right hand		
2037-1212	Summit® 1.6 rigid flapper flush valve		
400A	Fluidmaster® anti-siphon pilot fill valve		
2206	Anti-siphon pilot fill valve (compatible replacement)		
630-0030	Replacement flush valve seal		
386-LID	Tank lid		



382-376RH SUMMIT® PRO

MANSFIELD®

Elongated Front, Vitreous China, Two-Piece Toilet

SPECIFICATIONS

MODEL #	DESCRIPTION	CODES/STANDARDS
382-376RH	Elongated front, (1.6 gpf/6.0 lpf) two-piece toilet	C ®

MATERIAL	Vitreous China
WATER PRESSURE RANGE	20 to 80 PSI
FLUSH SYSTEM	MagnaFlush™ flushing technology
WATER USAGE	1.6 gpf / 6.0 lpf
WATER SURFACE AREA	9' X 10'
ROUGH-IN	12'
MAP RATING	1,000 grams


TRAP DIAMETER	2'
TRAP SEAL	2-1/4'
SHIPPING WEIGHT	Model 382 - 50 lbs. (22.6 kg) Model 376RH - 36 lbs. (16.3 kg)
WARRANTY	Vitreous China - Limited Lifetime Tank Trim - Limited Five Year

TANK OPTIONS

376 Variation of model 376RH, with left hand trip

TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

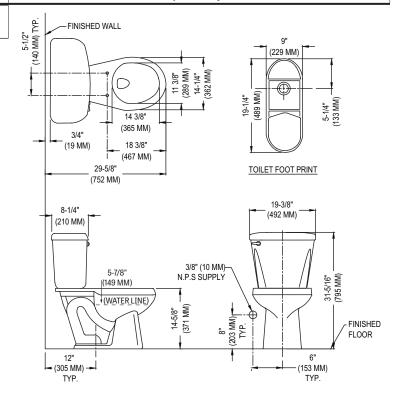



 $Fixture\ performance\ and\ specifications\ meet\ or\ exceed\ ASME\ A112.19.2/CSA\ B45.1\ standards, and\ other\ state\ and\ local\ codes.$