384-376 **SUMMIT® PRO**

MANSFIELD®

Elongated Front, SmartHeight™, Vitreous China, Two-Piece Toilet

FEATURES

- High performance MagnaFlush™ flushing technology
- 1.6 gpf / 6.0 lpf low water consumption
- · Elongated front, SmartHeight™ bowl (ADA compliant)
- SmartFasten™ 3-bolt tank-to-bowl connection
- PuraClean® easy-to-clean glaze
- 3' Rigid Flapper flush valve requires less force to flush, is more consistent and uses a simple universal repair part/seal
- · Fluidmaster® pilot operated anti-siphon fill valve
- 12' rough-in
- · Model 59 color match, metal trip lever
- · 2' glazed trapway
- The Mansfield® limited lifetime warranty on china, Five-year limited warranty on tank trim
- · Available in White



COMPONENTS

MODEL #	DESCRIPTION	CODES/STANDARDS		
384-376	Elongated front, SmartHeight™, two-piece toilet. Less toilet seat and supply.			
384	Elongated front, SmartHeight™ toilet bowl only. Less supply.			
376	Tank and cover only, with left hand, front-mount, color match, metal trip lever. Less supply.	C 💛 🕲 ADA COMPLIANT		
TANK TRIM & REPLACEMENT PARTS				
59	Trip lever - color match, metal trip lever, left hand			
2037-1212	Summit® 1.6 rigid flapper flush valve			
400A	Fluidmaster® anti-siphon pilot fill valve			
2206	Anti-siphon pilot fill valve (compatible replacement)			
630-0030	Replacement flush valve seal			
386-LID	Tank lid			



384-376 **SUMMIT® PRO**

MANSFIELD®

Elongated Front, SmartHeight™, Vitreous China, Two-Piece Toilet

SPECIFICATIONS

MODEL #	DESCRIPTION	CODES/STANDARDS
384-376	Elongated front, SmartHeight™ (1.6 gpf/6.0 lpf) two-piece toilet	C ® ADA COMPLIANT

MATERIAL	Vita a cons Obias
MATERIAL	Vitreous China
WATER PRESSURE RANGE	20 to 80 PSI
FLUSH SYSTEM	MagnaFlush™ flushing technology
WATER USAGE	1.6 gpf / 6.0 lpf
WATER SURFACE AREA	9' X 10'
ROUGH-IN	12'
MAP RATING	1,000 grams

TRAP DIAMETER	2'
TRAP SEAL	2-3/8'
SHIPPING WEIGHT	Model 384 - 54 lbs. (24.4 kg) Model 376 - 36 lbs. (16.3 kg)
WARRANTY	Vitreous China - Limited Lifetime Tank Trim - Limited Five Year


TANK OPTIONS

376RH

Variation of model 376, with right hand trip

TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

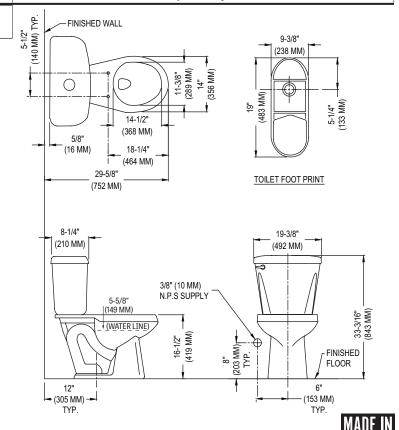

Fixture performance and specifications meet or exceed ASME A112.19.2/CSA B45.1 standards, and other state and local codes.