4135CTK **PRO-FIT®2 - 1.28**

MANSFIELD®

Complete Toilet Kit, Elongated Front, Vitreous China, Two-Piece Toilet

FEATURES

- · Complete toilet kit (CTK)
- 3-bolt SmartFasten[™] tank-to-bowl connection
- 1.28 gpf / 4.8 lpf high efficiency water consumption
- Uses 20% less water than conventional toilets
- · Elongated front bowl
- 3-2" hybrid flapper flush valve
- · Fluidmaster® anti-siphon pilot fill valve
- 12' rough-in
- · Model 31 color-match, plastic trip lever
- · 2' glazed trapway
- The Mansfield® Limited Lifetime Warranty
- · Available in White, Biscuit, and Bone



Complete toilet kit

COMPONENTS

MODEL #	DESCRIPTION	CODES/STANDARDS	
4135CTK	Elongated front, two-piece toilet kit. Includes toilet seat, wax ring, floor bolts, caps and multi-lingual installation instructions. Water supply hardware not included. Specify color.	(sterSet)	
135	Elongated front, toilet bowl only. Less toilet seat. Specify color.		
3173	Tank and cover only with left hand, front-mount, color-match, plastic trip lever. Fluidmaster® fill valve. Less supply. Specify color.	HIGH EFFICIENCY TOULET	
SB200	Elongated front, plastic toilet seat and cover.		
TANK TRIM & REPLACEMENT PARTS			
31	Trip lever – color-match, plastic trip lever, left hand		
228	3-2" Hybrid flapper flush valve		
400A	Fluidmaster® anti-siphon pilot fill valve		
2206	Anti-siphon pilot fill valve (compatible replacement)		
630-0207	3" Replacement flapper kit		
160-LID	Tank lid		



4135CTK PRO-FIT®2 - 1.28

MANSFIELD®

Complete Toilet Kit, Elongated Front, Vitreous China, Two-Piece Toilet

SPECIFICATIONS


MODEL #	DESCRIPTION	CODES/STANDARDS
4135CTK	Elongated front (1.28 gpf / 4.8 lpf) two-piece toilet kit	HIGH EFFICIENCY TOULET

MATERIAL	Vitreous China
WATER PRESSURE RANGE	20 to 80 PSI
FLUSH SYSTEM	3-2" Hybrid flapper flush valve
WATER USAGE	1.28 gpf / 4.8 lpf
WATER SURFACE AREA	9' X 10'
ROUGH-IN	12'
MAP RATING	800 grams

TRAP DIAMETER	2'
TRAP SEAL	2-1/2'
SHIPPING WEIGHT	
	Model 4135CTK - 88 lbs. (40 kg)
WARRANTY	Vitreous China - Limited Lifetime Tank Trim - Limited One Year

TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

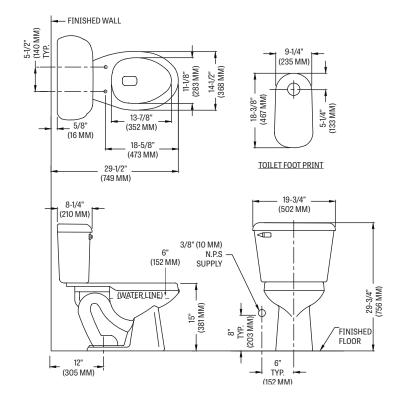

Fixture performance and specifications meet or exceed ASME A112.19.2/CSA B45.1 standards, and other state and local codes.

