

Eclipse LED

Wall Mounted • Damp Location Listed PROGRESS LED



Description:

This wall sconce offers contemporary styling perfect for residential and commercial settings. A satin white glass shade as been crafted in a captivating half-moon silhouette. The shade is cradled in a beveled black metal frame for a classic touch.

Specifications:

- Satin White glass Shade
- A satin white glass shade as been crafted in a captivating half-moon silhouette.
- The shade is cradled in a beveled black metal frame for a classic touch.
- This wall sconce offers contemporary styling perfect for residential and commercial settings.
- Ideal for any hallway, foyer, bathroom, sitting room, or stairway.
- Perfect for transitional, modern, or contemporary settings.
- Measures 15-1/2-inch width by 7-1/2-inch height.
- Uses one LED module (17w max).
- Compatible with many Triac/ELV dimmers (see dimming controls)
- Includes installation instructions and mounting hardware.
- Progress Lighting products are designed for exceptional quality, reliability, and functionality.
- Dimmable to 10% brightness (See Dimming Notes)
- Canopy covers a standard 4" recessed outlet box: 15.25 in W., 7.625 in ht., 1.25 in depth
- 1/8 IP mounting plate for outlet box included
- 6 in of wire supplied
- Americans With Disabilities Act (ADA) compliant

Performance:

Number of Modules	1
Input Power	17 W
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	1,276/73 (LM-82)
CCT	3000 K
CRI	90 CRI
Life (hours)	60000 (L70/TM-21)
EMI/RFI	FCC Title 47, Part 15, Class B
Warranty	5-year Limited Warranty
Labels	cCSAus Damp Location Listed ENERGY STAR® qualified Meets California Title 24 JA8-2016


P710090-031-30



Dimensions:

Width: 15-1/2 in
Height: 7-1/2 in
Depth: 4 in
H/CTR: 3 in

Satin White glass Shade
Width: 12-3/8 in
Height: 6-3/16 in

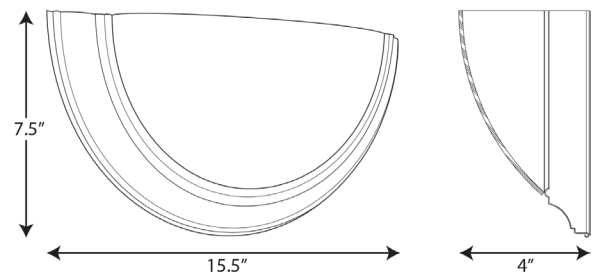


Photometrics:

P710090-031-30

ELECTRICAL DATA P710090-031-30

Input Voltage 120 V
 Input Frequency 60 Hz
 THD <20%
 EMI/RFI FCC Title 47, Part 15, Class B
 Operating Temperature -30 °C to 30 °C
 Dimming Yes*
 Over-voltage, over-current, short-circuit protected
 *See Dimming Notes for more information

P710090-031-30
 LED Light Engine: 3000 K 90 CRI
 System Wattage: 17
 Fixture delivered lumens: 909
 Fixture Efficacy: 51.4
 Spacing Criteria: 2.94 | 1.33 | 0.40

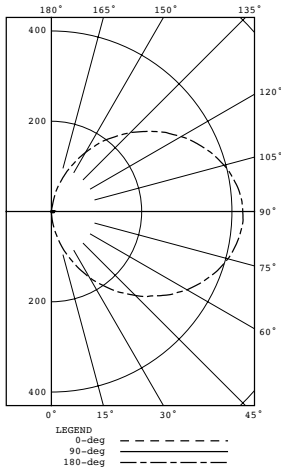

Test 19.01446 Test Date 08/19/19

CANDELA DISTRIBUTION		CANDELA DISTRIBUTION					FLUX
		0.0	45.0	90.0	135.0	180.0	
0	49	49	49	49	49	49	
5	60	57	50	42	38	5	
15	82	72	48	29	19	14	
25	101	84	46	16	5	23	
35	116	93	42	5	0	31	
45	129	99	37	1	1	39	
55	137	103	32	0	0	45	
65	140	101	26	0	0	49	
75	139	98	21	0	0	49	
85	132	90	16	0	0	47	
90	127	85	13	0	0		
95	123	83	13	4	4	45	
105	120	81	22	20	21	52	
115	141	118	44	40	61	75	
125	215	163	72	64	80	99	
135	247	187	98	96	97	107	
145	266	193	118	129	127	99	
155	206	157	132	154	159	72	
165	156	143	141	159	169	43	
175	143	143	146	151	154	14	
180	146	146	146	146	146		

ZONAL LUMEN SUMMARY		
ZONE	LUMENS	%FIXT
0-30	42	4.6
0-40	73	8.0
0-60	157	17.3
0-90	302	33.3
90-120	172	18.9
90-130	272	29.9
90-150	477	52.5
90-180	607	66.7
0-180	909	100.0

Dimming Notes:

P710090-031-30 is designed to be compatible with many Triac/ELV controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls:

Lutron Diva DVELV-300P

Lutron Nova T NTELV-300

Lutron Caseta

Lutron Ariadni AY-600P

Leviton Illumatech IPI06-1LZ

Lutron Lumea LG-603PG

Leviton SureSlide 6672

Leviton SureSlide 6674

Lutron Ariadni AYCL-153P

Lutron Skylark Contour CTCL-153P

Lutron Diva DVCL-153P

Pass & Seymour Harmony DCL453PTCCCV6

Lutron Toggler TGCL-153P

Lutron Maestro MACL-153M

Lutron Ariadni AYL-600P

Lutron Maestro MA-600

Lutron NOVA T NTLV-600

lutron Maestro MAELV-600

Lutron spacer/system SPSELV-600

Lutron Renoir II AWRMG-EAW

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation.

Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.

P710090-031-30