



Deluxe 65-1/2" H sliding shower door with 1/8"-thick glass 572113-G10

Features

- Reversible top track and towel bar allow a choice between rounded or accented design.
- Tempered glass ensures enhanced safety and durability.
- Continuous guide mechanism for smooth, quiet sliding action and easy cleaning.

Material

- Framed, 1/8" (3 mm) thick Pebbled tempered glass.
- Anodized aluminum prevents rust and corrosion.

Installation


- Fits opening widths 54-3/8" - 59-3/8" (1381 - 1508 mm).
- 65-1/2" (1664 mm) high, with 63-5/16" (1608 mm) minimum head clearance.
- 3/8" (10-mm) out-of-plumb adjustability on each side simplifies installation.
- Door can be installed to open to the left or right to suit your bathroom layout.
- For residential use only.
- Not for use in hospitality.

Recommended Products/Accessories

K-23723 Faucet cleaner

Included Components

Additional Components:
Hardware kit

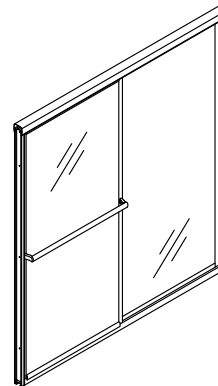

Codes/Standards

ANSI Z97.1
CPSC 16CFR 1201

STERLING® One-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color	Code	Description
-------	------	-------------

	N	
--	---	--

Available Glass Options

Code	Description
------	-------------

G10	Pebbled
-----	---------

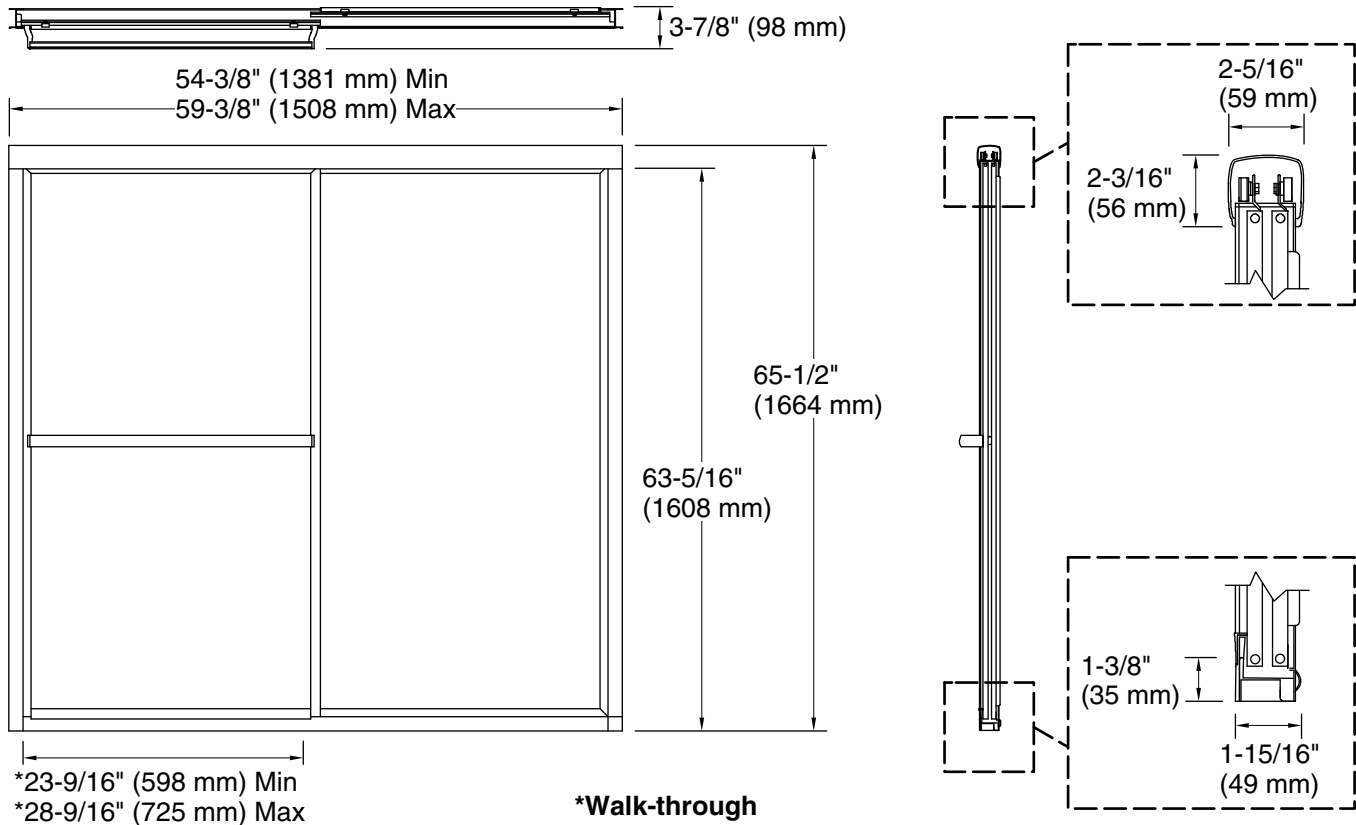

***Walk-through**

Technical Information

All product dimensions are nominal.

- Installation type: For shower base installation
- Opening Width - Min: 54-3/8" (1381 mm)
- Opening Width - Max: 59-3/8" (1508 mm)
- Walk-through - Min: 23-9/16" (598 mm)
- Walk-through - Max: 28-9/16" (725 mm)
- Base-To-Wall Radius - Max: 1/2" (13 mm)
- Glass thickness: 1/8" (3 mm)

Notes

The vertical opening should be a minimum of 67" (1702 mm) to allow for installation clearance.