

QUARTER-TURN ANGLE SUPPLY STOP

/// 130 SERIES

SPECIFICATION

Tomahawk 130 series quarter-turn supply stops shall be used as a means of controlling pressure water connections to plumbing fixtures for the purpose of being able to turn off flow for repairs or emergency situations.

INSTALLATION

Attach to pressure piping as prescribed by inlet connection on stop valve. Connect supply hose of desired configuration to outlet of supply.

MATERIALS

- Valve body:** no lead brass
- Ball:** chrome-plated brass
- Ball seats:** polytetrafluoroethylene (P.T.F.E.)
- Handle:** zinc
- Stem o-rings:** rubber
- Sleeve:** brass
- Nut:** brass


DIMENSIONS

	-G2C1C	-G2C0C	-G2X1C	-G2X0C	-G2W1C	-G2W0C	-G2V1C	-G2S1C	-G2F1C	-G1F1C
A: overall length	2.4"	2.4"	2.221"	2.221"	2.303"	2.303"	2.693"	2.063"	2.461"	2.402"
B: overall height	1.684"	1.710"	1.549"	1.571"	1.549"	1.571"	1.714"	1.549"	1.663"	1.603"
C: overall width	1.075"	1.075"	0.815"	0.815"	0.815"	0.815"	1.084"	0.815"	1.077"	0.891"

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____



130-G2C1C

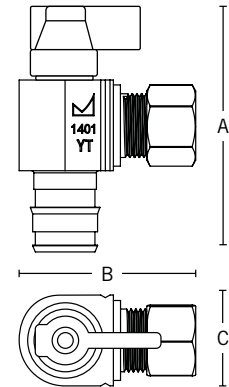

Create Item Number

130-GAB

e.g. 130-G2W1C: 1/2" PEX F1960 Grip™ x 3/8" compression angle quarter-turn supply stop

INLET CONNECTION A

- 2C = 5/8" compression
- 2X = 1/2" PEX F1807 Crimp™
- 2W = 1/2" PEX F1960 Grip™
- 2V = 1/2" CPVC*
- 2S = 1/2" sweat*
- 1F = 3/8" FIP*
- 2F = 1/2" FIP*

OUTLET CONNECTION B

- 0C = 1/4" compression
- 1C = 3/8" compression

* 3/8" compression outlet only

