

ADJUSTABLE CLEANOUT

851 series

SPECIFICATION

Sioux Chief 851 Series adjustable cleanout shall be used where necessary in drainage systems. Cleanout shall have a cast iron push-joint connection. Cleanout cover shall meet applicable load requirements for intended use. Cleanout shall include a slotted, polypropylene cleanout plug, with threaded brass insert to accept cover screw.

MATERIALS

- adapter body*: cast iron
- push-joint gasket*: neoprene
- ring/cover*: nickel-bronze, tenz alloy, or cast iron
- set screws*: square head, 1/4-20
- cover screw*: stainless steel, Phillips head, 1/4-20
- cleanout plug*: slotted polypropylene with threaded brass insert

COVER LOAD RATING

- nickel-bronze*: 2,500 lbs. (medium duty)
- tenz alloy*: 1,250 lbs. (light duty)
- cast iron*: 7,500 lbs. (heavy duty)


DIMENSIONS

| | <i>nickel/ tenz</i> | <i>cast iron</i> |
|------------------------|-------------------------|----------------------|
| A: ring/cover diameter | | |
| 4" cleanout | 6" | 6" |
| 6" cleanout | 8 3/8" | 8 3/8" |
| B: height | | |
| 4" cleanout | 3 1/4" - 4 1/2" | 3 3/4" - 5 3/4" |
| 6" cleanout | 3 7/8" - 5" | 4 1/2" - 6" |
| C: plug | | |
| 4" cleanout | 4" MIP | 4" MIP |
| 6" cleanout | 5" MIP | 5" MIP |

| |
|------------------------|
| Item # Submitted _____ |
| Job Name _____ |
| Location _____ |
| Engineer _____ |
| Contractor _____ |
| PO# _____ TAG _____ |



851-6(N)

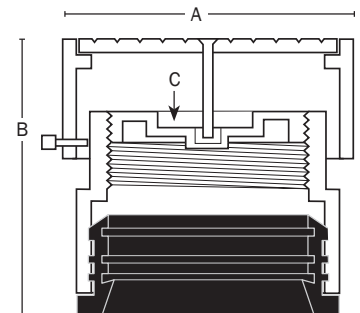

Create Item Number

851-ABC

e.g. 851-63iNV = 3" connection cast iron push-joint cleanout with nickel-bronze laminated cast iron cover and vandal-proof screw

A CONNECTION SIZE

- 64 4" push-joint
- 66 6" push-joint

B RING & COVER

- N nickel-bronze
- T tenz alloy
- i cast iron

D OPTIONS (FACTORY INSTALLED)

- V vandal-resistant cover screws
- S stamped cover, specify letters ¹
- C carpet marker

¹ NOT available with cast iron ring & cover