


ASSEMBLY INSTRUCTIONS

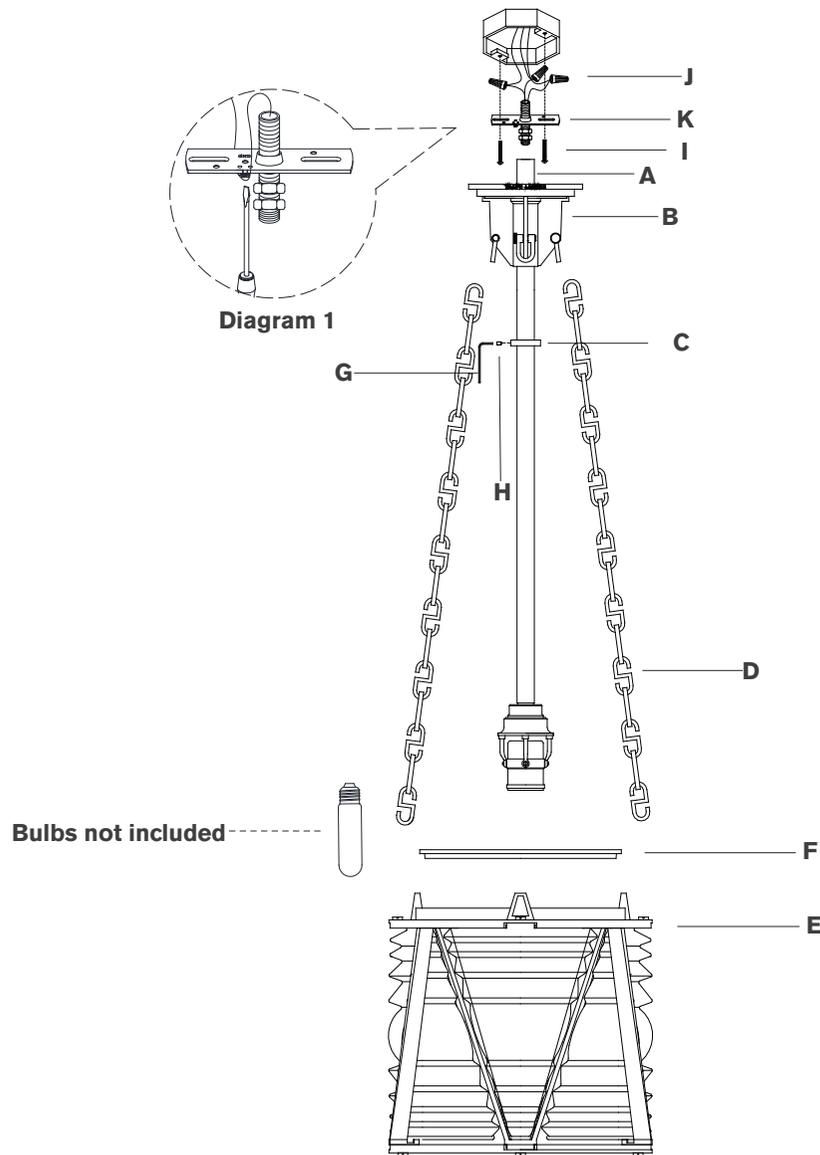

Chatham Small Lantern

Item # RL 5147

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver	Slotted Screwdriver	Chain Pliers
Slip Joint Pliers	Measuring Tape	Wire Cutters
Wire Strippers		

- Carefully remove all parts from the box. Place on a clean, soft surface.
- Install mounting plate (**K**) to junction box and secure with mounting screws (**I**).
- Loosen collar ring (**C**) by unscrewing set screw (**H**) using wrench (**G**), let canopy ring (**C**) and canopy (**B**) slip down rod (**A**) carefully.
- Thread rod (**A**) to the nipple of mounting plate (**K**) using pliers to tighten locknut.
- Cut excess wires, being sure to leave enough to reach the junction box.


NOTE: : Separate two sides of molded wire, and strip insulation on each 5/8".

- Wrap fixture ground wire (bare copper) around the green grounding screw (see diagram 1). Tighten. Continue fixture ground wire and connect to supply ground wire (usually green or bare copper) using wire nut (**J**).

RALPH LAUREN



ASSEMBLY INSTRUCTIONS

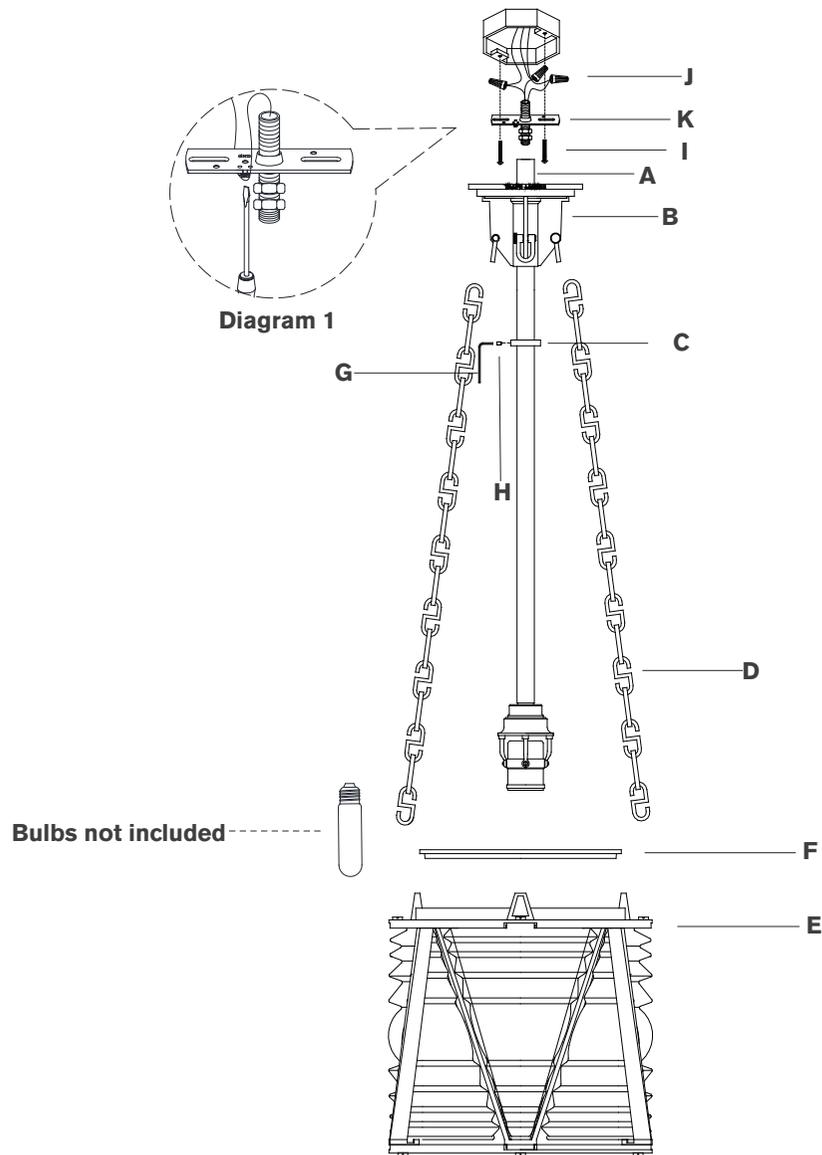

Chatham Small Lantern

Item # RL 5147

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

7. Connect fixture neutral wire (ribbed) to the supply neutral wire (usually white) using wire nut (J).
8. Connect fixture hot wire (smooth with markings) to the supply hot wire (usually black) using wire nut (J).
CAUTION: Do not reverse the hot and neutral connections.
9. Make sure all wire connections are tight, then carefully tuck into the junction box.
10. Install canopy (B) to mounting plate (K) by securing with collar ring (C). Tighten set screw (H) using wrench (G).
11. Insert bulb into the socket.
12. Install glass diffuser (F) into lamp shade (E) by inserting through top opening and gently resting on bottom.
13. Attach chains (D) to hooks on canopy (B) and fixture body (E).

Care Instructions: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.

RALPH LAUREN