
# CUBE ARCHITECTURAL DC-CD05 (CC) WAC LIGHTING

## Color Changing LED Ceiling

### Responsible Lighting®

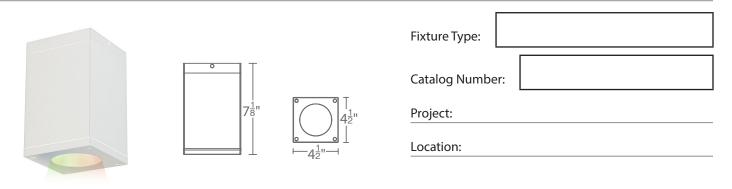

#### **PRODUCT DESCRIPTION**

The latest LED, Bluetooth, and DMX technology for precise color selection in an appealing cylindrical profile. Perfect for accent and wall wash lighting. Available in various light distribution and beam angle options.

#### **FEATURES**

- Full color gamut control through gradients of saturated colors from 1-100%
- Tunable White (CCT) Range: 1650-8000K
- Bluetooth control via ilumenight<sup>™</sup> iOS App
- · High performance LED ceiling light
- Solid die cast aluminum construction
- · 5 year warranty

#### **SPECIFICATIONS**

Input: Universal voltage 120V - 277V, 50/60Hz

**Controls: DMX512-A** with advanced commissioning via Bluetooth.

**Bluetooth v4.0** - Configured with ilumenight<sup>™</sup> iOS App for localized ( within 150ft line of sight ) groups of 8 luminaires or less. (DMX512-A hardwire recommended for high wireless signal

interference environments).

**Dimming:** 100%-1% in CCT & Color via DMX or Bluetooth control **Light Source:** High output 2 Step MacAdam Ellipse LEDs, 90+ CRI

Rated life of 50,000 hours at L70

Finish: Electrostatically powder coated white, black, bronze and graphite

Standards: IP65 rated, UL & cUL wet location listed

Operating

**Temperature:**  $-13^{\circ}F$  to  $122^{\circ}F$  ( $-25^{\circ}C$  to  $50^{\circ}C$ )

Diameter	Power	Beam	Delivered Lumens @ 3000K	CBCP @ 3000K	Color Temp	Finish
DC-CD05 5"	31W	S 15° N 25° F 30°	735 645 620	6177 1951 1386	<b>CC</b> Color Changing	BK Black WT White BZ Bronze GH Graphite

DC- CD05-\_\_-CC-\_\_\_

Example: DC-CD05-S-CC-WT

