

7"/11"/15" Round

Ceiling and Wall Mount

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
FM-07RN 7"	930 3000K - 90	15W	1100	BK Black
	935 3500K - 90	15W	1100	BN Brushed Nickel
FM-11RN 11"	930 3000K - 90	20W	1525	BZ Bronze
	935 3500K - 90	20W	1525	WT White
FM-15RN 15"	930 3000K - 90	28W	2550	
	935 3500K - 90	28W	2550	

Example: **FM-07RN-930-BK**

DESCRIPTION

Ultra-slim flush mount that uses edge-lit technology and a translucent diffuser for uniform illumination without shadows or hotspots.

FEATURES


- Multiple LED array for uniform illumination
- Driver installed within the Junction Box, driver dimension: 2.25" dia x 1" deep
- 5 year warranty

SPECIFICATIONS

Construction:	Aluminum with translucent diffuser
Power:	28W, 20W, 15W
Input:	120 VAC, 50/60Hz
Dimming:	ELV: 100-5% , TRIAC: 100-5%
Light Source:	Integrated LED
Lens:	Translucent acrylic diffuser
Rated Life:	50000 Hours
Mounting:	Installs over a 3", 4" or 3/0-4/0 hybrid junction box, Can be mounted on ceiling or wall in all orientations
Finish:	Electrostatically Powder Coated:White, Electrostatically Powder Coated::Bronze, Electrostatically Powder Coated::Brushed Nickel, Electrostatically Powder Coated:::Black
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	UL, cUL, Damp Location Listed, Energy Star 2.0, Title 24 JA8-2019 Compliant, ADA



FINISHES:

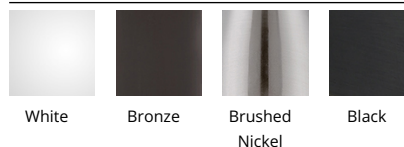

LINE DRAWING:

