

Lotos 2" & Multiples

Adjustable Downlight 3000K

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model	Beam	Color Temp & CRI	Lumens	CBCP	Finish
R2ERAR	W 45°	930 3000K - 90	530	No	WT White

Example: **R2ERAR-W930-WT**

For custom requests please contact customs@wacighting.com

DESCRIPTION

The wafer-thin Lotos LED Recessed Kit with remote driver combines high quality light output and efficiency while eliminating the need for a large housing. This innovative design can be installed easily as a remodel. Lotos is available in a downlight version for general ambient lighting and an adjustable version with a gimbal that pivots 360 degrees on a hinge.

FEATURES

- Multiple LED array for uniform illumination
- Rotatable multi-axis gimbal ring
- Driver included
- 5 year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120 -277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100-5% , TRIAC: 100-5%
Rated Life:	50000 Hours
Mounting:	Heavy gauge retention clips secures fixture to ceiling
Standards:	ETL, cETL, Title 24 JA8-2019 Compliant, Energy Star 2.0 Wet Location Listed
Construction:	Steel with frosted TIR lens




FINISHES:



White

LINE DRAWING:

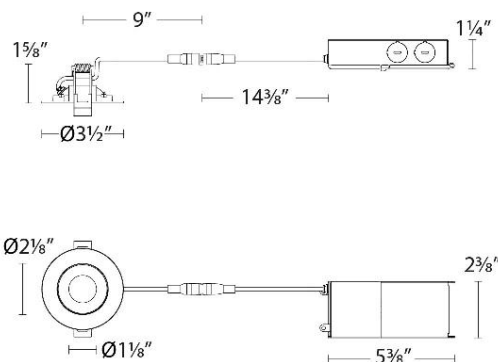

Lotos 2" & Multiples

Adjustable Downlight 3000K

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model	Beam	Color Temp & CRI	Lumens	CBCP	Finish
R2ESAR	W 45°	930 3000K - 90	530	No	WT White

Example: **R2ESAR-W930-WT**

For custom requests please contact customs@wacighting.com

DESCRIPTION

The wafer-thin Lotos LED Recessed Kit with remote driver combines high quality light output and efficiency while eliminating the need for a large housing. This innovative design can be installed easily as a remodel. Lotos is available in a downlight version for general ambient lighting and an adjustable version with a gimbal that pivots 360 degrees on a hinge.

FEATURES

- Multiple LED array for uniform illumination
- Rotatable multi-axis gimbal ring
- Driver included
- 5 year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120 -277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100-5% , TRIAC: 100-5%
Rated Life:	50000 Hours
Mounting:	Heavy gauge retention clips secures fixture to ceiling
Standards:	ETL, cETL, Title 24 JA8-2019 Compliant, Energy Star 2.0 Wet Location Listed
Construction:	Steel with frosted TIR lens




FINISHES:



White

LINE DRAWING:

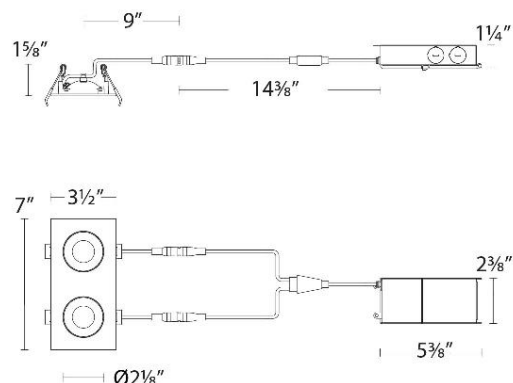

Lotos 2" & Multiples

Adjustable Downlight 3000K

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model	Beam	Color Temp & CRI	Lumens	CBCP	Finish
R2ESAR-2	W 45° x 2	930 3000K - 90	530 x 2	No	WT White

Example: **R2ESAR-2-W930-WT**

For custom requests please contact customs@wacighting.com

DESCRIPTION

The wafer-thin Lotos LED Recessed Kit with remote driver combines high quality light output and efficiency while eliminating the need for a large housing. This innovative design can be installed easily as a remodel. Lotos is available in a downlight version for general ambient lighting and an adjustable version with a gimbal that pivots 360 degrees on a hinge.

FEATURES

- Multiple LED array for uniform illumination
- Rotatable multi-axis gimbal ring
- Multiple fixture heads with individual adjustability
- Driver included
- 5 year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120 -277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100-5% , TRIAC: 100-5%
Rated Life:	50000 Hours
Mounting:	Heavy gauge retention clips secures fixture to ceiling
Standards:	ETL, cETL, Title 24 JA8-2019 Compliant, Energy Star 2.0 Wet Location Listed
Construction:	Steel with frosted TIR lens




FINISHES:



White

LINE DRAWING:

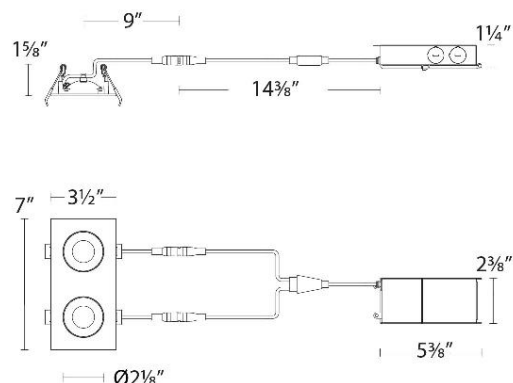

Lotos 2" & Multiples

Adjustable Downlight 3000K

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model	Beam	Color Temp & CRI	Lumens	CBCP	Finish
R2ESAR-3	W 45° x 3	930 3000K - 90	530 x 3	No	WT White

Example: **R2ESAR-3-W930-WT**

For custom requests please contact customs@wacighting.com

DESCRIPTION

The wafer-thin Lotos LED Recessed Kit with remote driver combines high quality light output and efficiency while eliminating the need for a large housing. This innovative design can be installed easily as a remodel. Lotos is available in a downlight version for general ambient lighting and an adjustable version with a gimbal that pivots 360 degrees on a hinge.

FEATURES

- Multiple LED array for uniform illumination
- Rotatable multi-axis gimbal ring
- Multiple fixture heads with individual adjustability
- Driver included
- 5 year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120 -277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100-5% , TRIAC: 100-5%
Rated Life:	50000 Hours
Mounting:	Heavy gauge retention clips secures fixture to ceiling
Standards:	ETL, cETL, Title 24 JA8-2019 Compliant, Energy Star 2.0 Wet Location Listed
Construction:	Steel with frosted TIR lens



FINISHES:



White

LINE DRAWING:

