

Eco-Lightbar LED

24V Undercabinet

Linkable Series


Catalog #:

Type:

Project:

Date:

Notes:

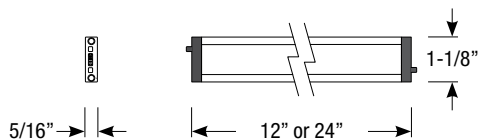

Electrical Data

Part Number	Wattage	Lumens	Efficacy
ELB-12 (12")	6W	500lm	83lpw
ELB-24 (24")	12W	1000lm	83lpw

Specifications

Housing

- Slim profile - only 5/16" height
- Extruded aluminum housing, PC molded end caps

LED Light Engine

- 6W or 12W LED @ 2700K or 3000K at 90 CRI
- 50,000 hours at 70% lumen maintenance (L70)

Finishes

Available in bronze or satin aluminum

Electrical

- 24V DC input
- Remote electronic or magnetic driver required
- Linkable up to 120W

Dimming

- Remote electronic drivers may dimmed with an electronic low voltage dimmer
- Remote magnetic drivers may dimmed with a magnetic low voltage dimmer

Linking

Eco-Lightbar can link multiple luminaires up to 120W. Luminaires include male and female connection points on both ends of each Lightbar. Lightbar can be connected end-to-end for seamless connection or with linkable connectors that are available in a variety of lengths, and can be connected together for custom lengths.

Mounting

Each luminaire includes standard mounting clips; adjustable and 45° mounting clips are also available.

Power Feed

72" or 144" power feed cable available. Can be connected to ELB-CON connectors for custom lengths.

Listing/Warranty

- Five (5) year limited warranty
- UL listed to US and Canadian standards for damp locations



Order Matrix

Eco-Lightbar (Example: ELB-12-BZ-30)

Series	Length	Finish	CCT / CRI
ELB	-12 (12")	-SA (Satin Aluminum)	-27 (2700K / 90 CRI)
	-24 (24")	-BZ (Bronze)	-30 (3000K / 90 CRI)

Accessories

Description
ELB-ANG-MTG (45° Mounting Clips)
ELB-ADJ-MTG (Adjustable Mounting Clips)
ELB-STN-MTG (Standard Mounting Clips - included)
ELB-PWR-72 (72" Power Feed)
ELB-PWR-144 (144" Power Feed)
ELB-CON-3 (3" Connector)
ELB-CON-6 (6" Connector)
ELB-CON-12 (12" Connector)
ELB-CON-24 (24" Connector)
ELB-CON-36 (36" Connector)

24V DC Electronic Drivers

Description
D-133E (20W Output / 120V Input)
D-134E (40W Output / 120V Input)
D-135E (60W Output / 120V Input)
D-136E (100W Output / 120V Input)
D-137E (150W Output / 120V Input)
D-157E (300W Output / 120V Input)

24V DC Magnetic Drivers

Description
D-133 (20W Output / 120V Input)
D-134 (40W Output / 120V Input)
D-135 (60W Output / 120V Input)
D-136 (100W Output / 120V Input)
D-137 (150W Output / 120V Input)
D-157 (300W Output / 120V Input)

Revised 09/06/17