

# NX-503-LED / NX-504-LED / NX-603-LED

Thermoplastic LED Exit Sign

Source: 2W normal operation

3.5W emergency operation

Type

Project

Catalog No.

Notes

## PRODUCT DESCRIPTION

Compact, low profile LED exit signs are as brilliant and visible as standard incandescent signs, yet use a fraction of the power. LED light sources require no maintenance for 25 years—saving greatly on maintenance and upkeep costs. LED exits are ideal for commercial and industrial standard non-emergency applications where low maintenance and operating costs are a must.

## BODY

- 12-1/8" Width X 8-3/4" Height X 1-3/4" Depth
- Injection-molded thermoplastic housing
- Black or white housing finish

## FACE

- 6" high text with color diffusion
- Both double and a blank face are included
- Replaceable knockout directional chevrons

## MOUNTING

- Wall, side or ceiling
- Mounting hardware and canopy included

## ELECTRICAL

**Voltage:** 120V or 277V Input

**Wattage:** 2W normal operation, 3.5W emergency operation

**Light Source:** LED

**Circuit Protection:** Isolated surge and short circuit protection. Disconnect for deep discharge.

## OPERATION

**NX-503-LED:** AC only

**NX-504-LED:** Second circuit for input from external EPS or other alternative emergency power source or generator

**NX-603-LED:** Emergency battery back-up included for 90 minute emergency operation

## LIFE EXPECTANCY

LED sources and PC circuitry are rated for a minimum of 25 years with no change in illumination level

## ACCESSORIES

**NEXL-R:** Spare Red Lens

**NEXL-G:** Spare Green Lens

**NEG-60:** Wet Location Enclosure for wall mounting only


**NEB-NICAD2:** Replacement Ni-Cad battery for NX-603-LED

## LABELS AND LISTINGS


- UL 924 Compliant
- NFPA
- NEC
- State & Municipal



## PRODUCT IMAGES AND DIMENSIONS

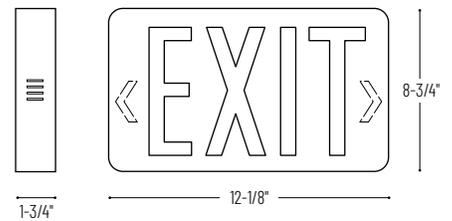

**NX-503-LED / NX-504-LED / NX-603-LED**  
Thermoplastic LED Exit Sign

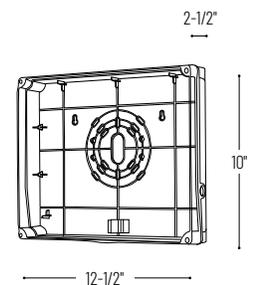

**NEG-60**  
Wet Location Enclosure

## Thermoplastic LED Exit Signs

Operation	Letter Color / Housing Color
<b>NX-503-LED</b> = AC only	<b>/G</b> = Green Letters / White Housing
<b>NX-504-LED</b> = 2-Circuit	<b>/BG</b> = Green Letters / Black Housing
<b>NX-603-LED</b> = Battery Backup	<b>/R</b> = Red Letters / White Housing
	<b>/BR</b> = Red Letters / Black Housing

## Accessories

Description
<b>NEXL-R</b> = Spare Red Lens
<b>NEXL-G</b> = Spare Green Lens
<b>NEG-60</b> = Wet Location Enclosure
<b>NEB-NICAD2</b> = Replacement Ni-Cad battery for NX-603-LED

Example: **NX-603-LED/R** = Thermoplastic LED Exit Sign, Battery Backup, Red Letters / White Housing