

LED Flush Mount

 Ceiling mounted • Damp location listed **PROGRESS LED**


P350105-015-30

Description:

Achieve a mid-century modern look with Elevate's on trend finishes. An etched white glass shade is highlighted with metallic accents. Increase ambient illumination in Transitional and Modern interiors with Elevate LED flush mount. Polished Chrome finish.

Specifications:

- Polished Chrome (-015) (plated)
- Steel Construction
- White Glass Bowl
- LED Module is replaceable (part # 93074038)
- Increase ambient illumination in Transitional and Modern interiors with Elevate LED flush mount
- One light LED flush mount
- Features 17-watt integrated LED to deliver energy savings and reduce long-term maintenance costs
- Popular Polished Chrome finish
- Etched white glass shade is highlighted with metallic accents
- A natural choice for closets, hallways and smaller areas within the home
- 1452 lumens, 83 lumens per watt (source)
- 3000K color temperature, 90CRI
- ENERGY STAR certified
- California JA8 certified.
- Dimmable to 10% brightness (See Dimming Notes)
- Fixture covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- 6" of wire supplied
- ENERGY STAR® qualified
- Meets California Title 24 JA8-2016

Performance:

Number of Modules	1
Input Power	17w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	1452/83 (LM-82)
Lumens/LPW (Delivered)	670/38.3 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	60,000 (L70/TM-21)
FCC	Meets FCC Title 47, Part 15 Class B
Min. Start Temp	-30 °C
Warranty	5 year limited warranty
Labels	cCSAus Damp location listed ENERGY STAR® qualified Meets California Title 24 JA8-2016

Images:



Dimensions:

Diameter: 13"
Height: 5-1/4"

Glass
Width: 12-1/4"
Height: 4-3/8"

Photometrics:

P350105-015-30

ELECTRICAL DATA	P350105-015-30
Input Voltage	120 V
Input Frequency	60 Hz
Input Current	0.142 A
Input Power	17
Power Factor	Greater than 0.90
THD	<20%
FCC	Meets FCC Title 47, Part 15 Class B
Operating Temperature	-30 °C to 30°C
Dimming	Yes*

*See Dimming Notes for more information

P350105-015-30

LED Light Engine: 3000 K 90 CRI

System Wattage: 17

Fixture delivered lumens: 670

Fixture Efficacy: 38.3


Spacing Criteria: 1.3

CANDELA DISTRIBUTION

DEG	CANDELA	LUMENS
0	152	
5	152	14
15	149	42
25	141	65
35	131	82
45	116	90
55	98	88
65	80	79
75	62	66
85	46	51
90	40	
95	33	36
105	21	23
115	13	13
125	7	6
135	3	3
145	1	1
155	0	0
165	0	0
175	0	0
180	0	

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	122	18.5
0-40	204	30.9
0-60	381	57.9
0-90	577	87.6
90-120	72	10.9
90-130	78	11.9
90-150	82	12.4
90-180	82	12.4
0-180	659	100.0

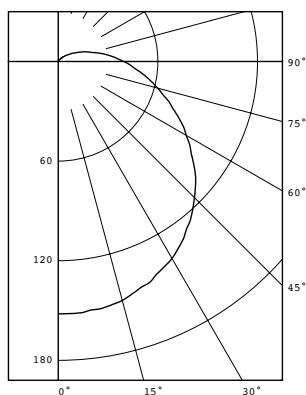

Test 17.02285 Test Date 8/24/17

P350105-015-30**Dimming Notes:**

P350105 is designed to be compatible with many Triac/Forward Phase or ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls

Lutron Diva DVELV-300P

Lutron Nova T NTELV-300

Lutron Caseta

Lutron Ariadni AY-600P

Leviton Illumatech IPI06-1LZ

Lutron Lumea LG-603PG

Leviton SureSlide 6672

Leviton SureSlide 6674

Lutron Ariadni AYCL-153P

Lutron Skylark Contour CTCL-153P

Lutron Diva DVCL-153P

Pass & Seymour Harmony DCL453PTCCCV6

Lutron Toggler TGCL-153P

Lutron Maestro MACL-153M

Lutron Ariadni AYL-600P

Lutron Maestro MA-600

Lutron NOVA T NTLV-600

Lutron Maestro MAELV-600

Lutron spacer/system SPSELV-600

Lutron Renoir II AWRMG-EAW

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.