



Tools Required

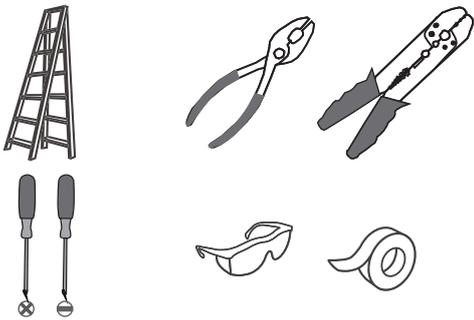

Light Source

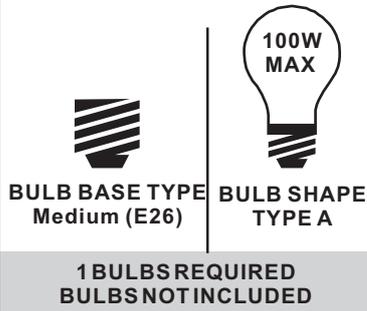

Fixture Height Adjustable 15.5" to 51.5"

Warnings and Cautions

Turn off the electricity at the circuit breaker before installation. Consult a licensed electrician if in doubt about installation.


Turn off power to the fixture and allow the bulbs to cool before replacing.

Package Contents

Preparation: Identify and inspect all parts before beginning the installation.

Missing or damaged parts? Contact your original place of purchase.

PARTS BAG



A Crossbar Assembly x 1

B Outlet Box Screw x 2

C Wire Connector x 3

D Quick Link x 1

E Ceiling Canopy x 1

F Small Loop x 1

G 6" L Rod x 2


I 12" L Rod x 2

H Fixture Body x 1


H Shade x 1

Table of Contents


Rods & Small Loop Crossbar Assembly




Quick Link



Wiring





Ceiling Canopy



Bulb




STEP 1

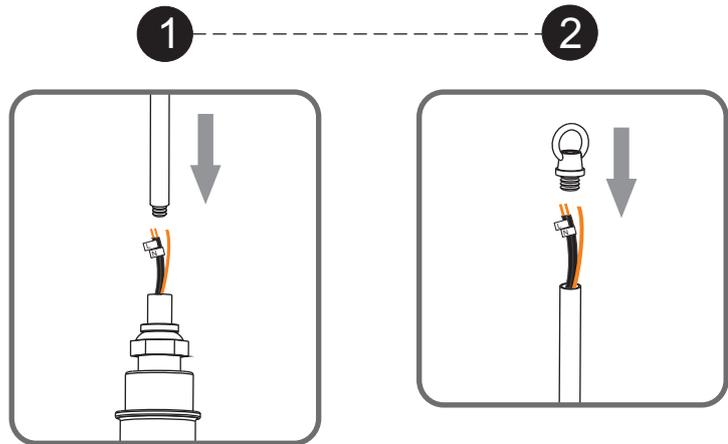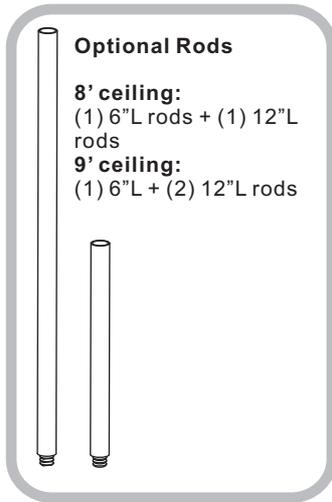

STEP 2


1

Step 1
Install crossbar assembly

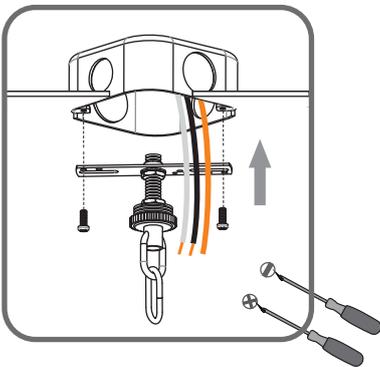


2


Step 2 - 3
Test fitting ceiling canopy to nipple



3

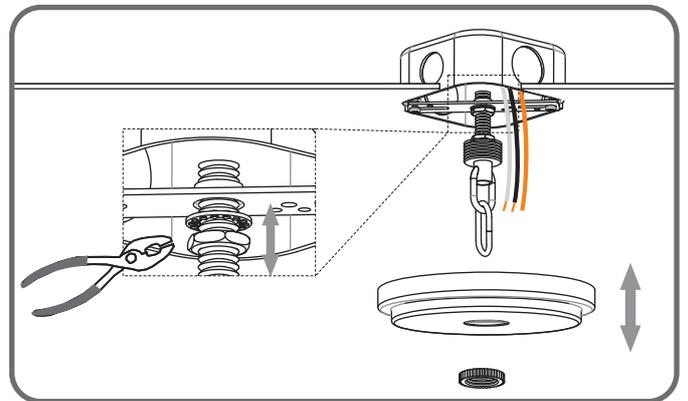


STEP 3

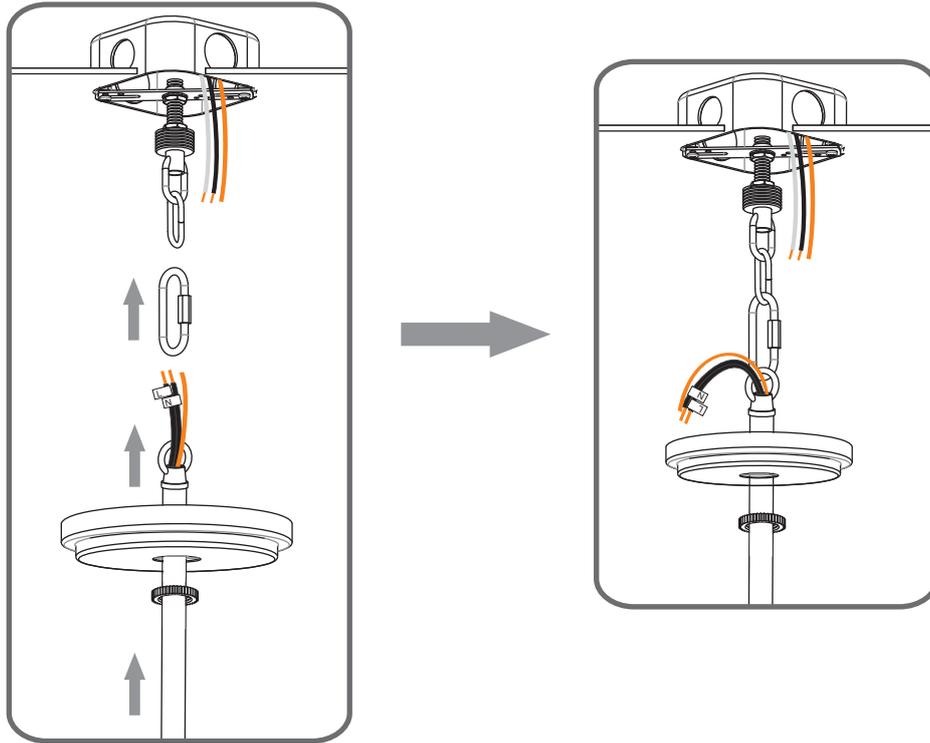


STEP 4

1


Step 1
Feed the fixture wires
through the loop

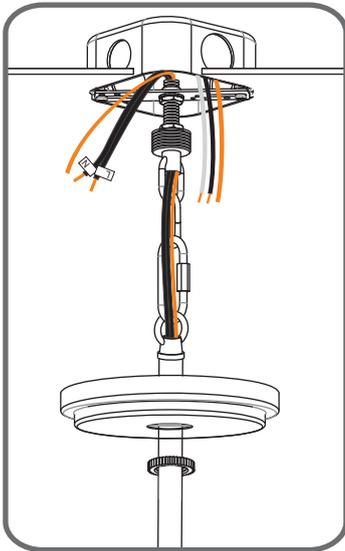

2

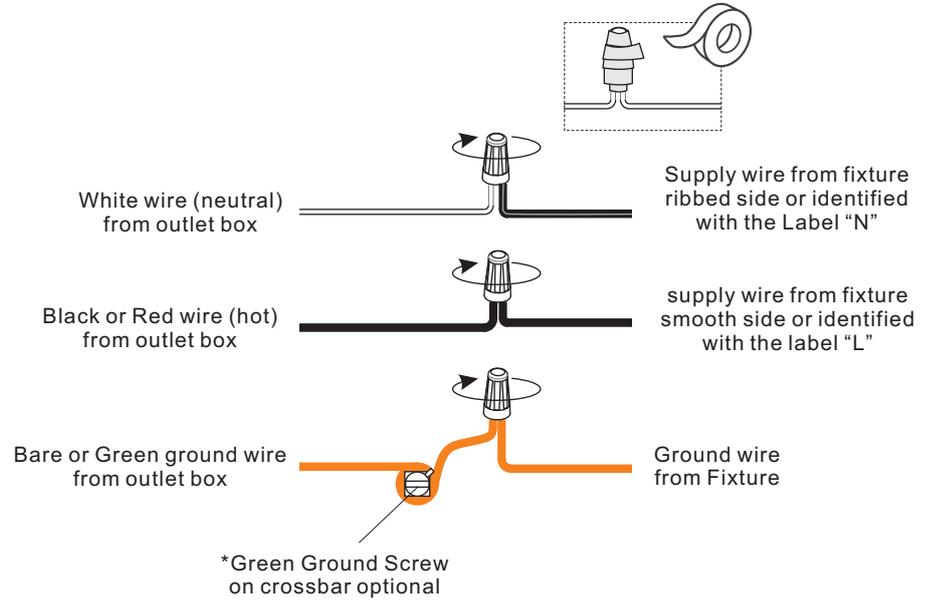


STEP 5

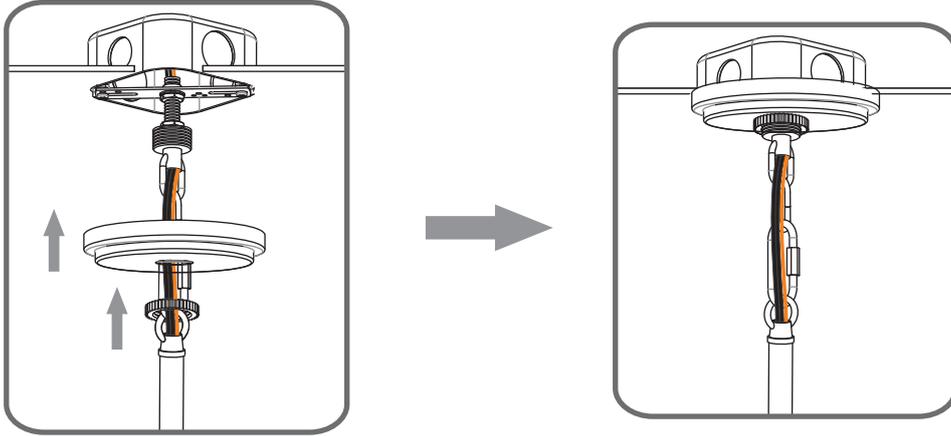

STEP 6

OPTION 1

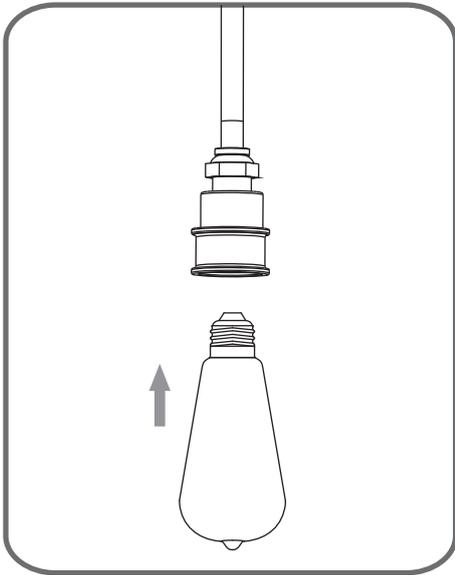

OPTION 2

