



# Windham™ Comfort Height®

Luxury Height HET-High Efficiency Toilet  
403082

## Features

- Two-piece installation
- 12" rough-in
- Elongated bowl
- 1.28 gallons per flush
- Pro Force® flushing technology
- Three-bolt quick-connect installation system
- Limited 5-year warranty
- ADA-adaptable when installed per requirements of the Accessibility Guidelines, Section 604 Water Closets, of the Act

## Recommended Products/Accessories

- K-7637 Angle Supply with Stop (single)
- K-4636 Cachet® Quiet-Close™ Elongated Toilet Seat
- K-5420 Low-Profile Bolt Caps
- K-5588 Purefresh® Elongated Toilet Seat
- K-4108 C3®-230 Elongated Cleansing Toilet Seat

## Included Components

Product consists of:

- 404551 Toilet Tank
- 403315 Toilet Bowl

Additional Components:

- Bolt cap accessory pack
- Tank cover
- Trip lever



**ADA** **CSA B651** **OBC**

## Codes/Standards

ASME A112.19.2/CSA B45.1  
EPA WaterSense®  
ADA  
ICC/ANSI A117.1  
CSA B651  
OBC

## STERLING® Warranty - Toilets and Lavatories

See website for detailed warranty information.

## Available Colors/Finishes

*Color tiles intended for reference only.*

### Color Code Description


	0	White
	96	KOHLER Biscuit

1-800-STERLING (1-800-783-7546)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to [www.sterlingplumbing.com](http://www.sterlingplumbing.com).

4-25-2019 21:57 - US/CA

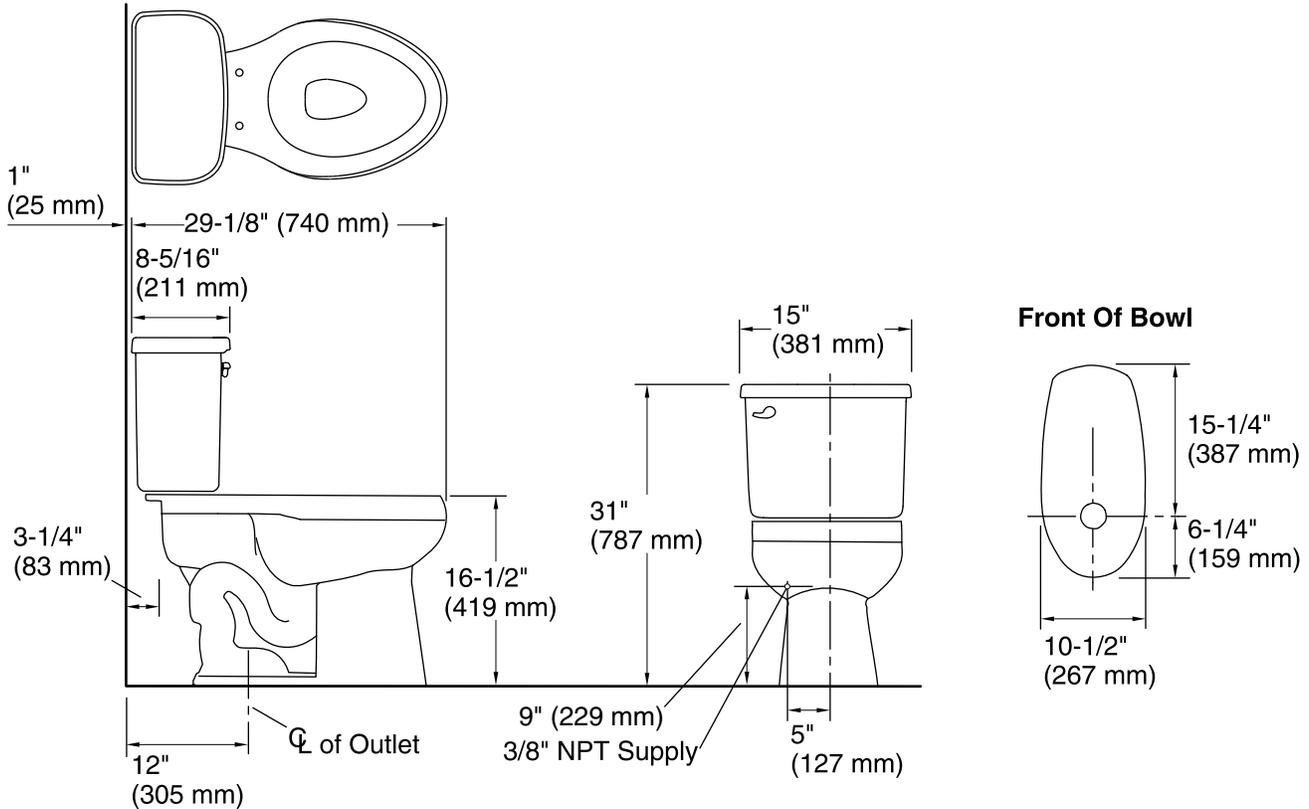

**Technical Information**

All product dimensions are nominal.

- Toilet type: Two-piece
- Bowl shape: Elongated
- Trap passageway: 2" (51 mm)
- Water surface size: 8" x 10" (203 mm x 254 mm)
- Rough-in: 12" (305 mm)
- Seat-mounting holes: 5-1/2" (140 mm)

**Notes**

- Install this product according to the installation instructions.
- The Model Plumbing Codes require the installation of elongated open-front toilet seats in public bathrooms.
- ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.
- Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.
- Accessibility standards may require controls to be located on the open side of the toilet.