

FLARE - Mini LED Pendant

PD-70913, PD-70925, PD-70937, PD-70945



Fixture Type:

Catalog Number:

Project: _____

Location: _____

PRODUCT DESCRIPTION

Symmetrical, cylindrical and aerodynamic. Brilliance alone or as a collection.

FEATURES

- Universal driver (120V - 277V) concealed within the canopy
- Color Temperature: 3000K
- CRI: 90
- Rated Life: 50,000 hours

SPECIFICATIONS

Construction: Aluminum body with extruded acrylic diffuser


Input: 120 - 277V

Dimming: 100% - 10% ELV / 0-10V / TRIAC

Light Source: High output LED

Finish: Brushed Nickel (BN), Black (BK)

Standards: ETL/cETL, Damp location listed, JA8 2016 Title 24 Compliant

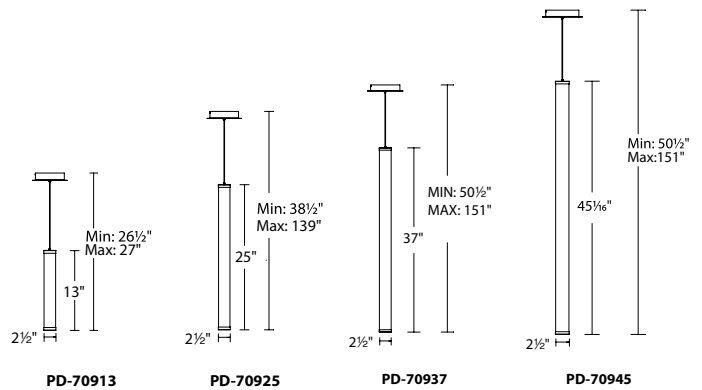

ORDER NUMBER

Model	Size	Watt	LED Lumens	Delivered Lumens	Finish
PD-70913	13"	11W	1099	745	
PD-70925	25"	27W	2426	1700	BN <i>Brushed Nickel</i>
PD-70937	37"	37W	3801	2637	BK <i>Black</i>
PD-70945	45"	42W	4254	2853	

Example: **PD-70945-BN**

dweLED.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760