

LIVING DISTRICT


Collection: Lily















Installation manual for:

LD7076D10BK/BR D9.8" H11.8" L1

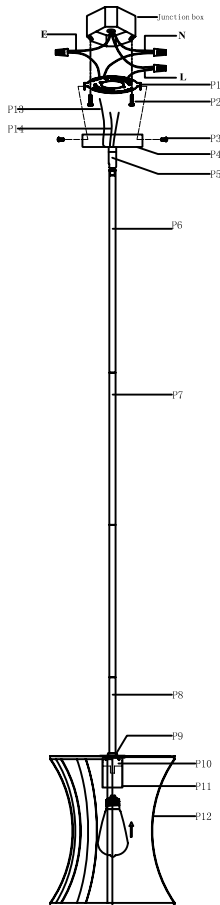Installation instructions:

1. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
 2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
 3. "E" wire from the fixture is attached to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
 4. Secure mounting bracket to the junction box.
 5. Insert the mounting bracket screw(P2) into the mounting bracket (P1)
 6. Twist rod(P8) to wire box on the wire box cover(P9), Assemble other 3 rods, connect Universal head(P5) with the rod(P6).
 7. Use the screw(P3) to lock the lamp body to the mounting bracket(P1) on the ceiling.
 8. Install E26 light source.(Bulbs not supplied)
- The end!



Part	Picture	Description	Qty	Check list
P1		mounting bracket Φ4.13"×H0.0.6"	1	
P2		Mounting bracket screw	2	
P3		Screw	2	
P4		Canopy D4.7"×H1"	1	
P5		Universal head Φ0.59"×H2.24"	1	
P6		Rod (ROD3013) L15.7"×Φ0.49"	1	
P7		Rod (ROD3013) L11.8"×Φ0.49"	2	
P8		Rod (ROD3013) L5.9"×Φ0.49"	1	
P9		Cover Φ0.79"×H0.19"	1	
P10		E26 holder	1	
P11		Socket Cup Φ1.57"×H2.48"	1	
P12		Lamp frame Φ9.8"×H11.8"	1	
P13		UL18#Ground wire, L9.84"	1	
P14		UL18#, L6"	1	

"L" = Hot wire

"N" = Neutral wire

"E" = Ground wire