

Collection: ROHAN


Installation manual for:

LD5006D30 D30"H15. 7"L4

## Installation instructions:

- 1.Install the metal tube (P9) on the lampbody (P12)
- 2.Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 3. White wire from ceiling (junction box) attaches to "N"wire from the fixture.
- 4."E" wire from the fixture is attaced to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 5. Secure mounting bracket to the junction box.
- 6.Insert screws (P2) in side of top unit the mounting bracket.
- 7. Fix the loop (P3) to screw tube, then cover the canopy (P4) and fix it by canopy ring(P5).
- 8.Install the bulbs(not included) into the lamp fixture.

## The end!

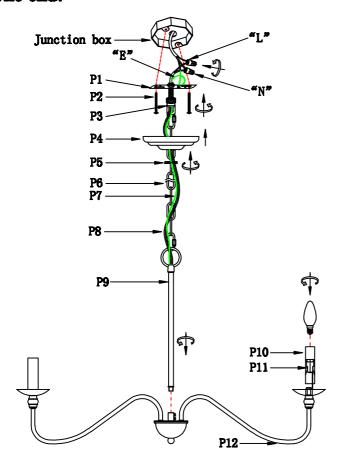

## PARTS LIST

| part | picture     | Description                       | Qty | Check | list |
|------|-------------|-----------------------------------|-----|-------|------|
| P1   |             | IA" Mounting<br>bracket           | 1   |       |      |
| P2   | <b>—</b>    | 5/32-32 Screw                     | 2   |       |      |
| P3   | 8           | Canopy loop<br>(Canopy part)      | 1   |       |      |
| P4   |             | ø5.3″ canopy<br>plat              | 1   |       |      |
| P5   |             | Canopy ring<br>(Canopy part)      | 1   |       |      |
| P6   | <del></del> | L59"CHAIN04P<br>Plain Design      | 1   |       |      |
| P7   | <i></i>     | ground wire                       | 1   |       |      |
| P8   | ~           | Power Cord 79"<br>SPT-1-18# Black | 1   |       |      |
| P9   | <b></b>     | L13. 7" tube                      | 1   |       |      |
| P10  |             | D1"*L3.5" tube                    | 4   |       |      |
| P11  | <u> </u>    | E12 lampholder                    | 4   |       |      |
| P12  | tvvt        | D29.5"*H8.2"<br>lampbody          | 1   |       |      |
|      |             |                                   |     |       |      |
|      |             |                                   |     |       |      |
|      |             |                                   |     |       |      |
|      |             |                                   |     |       |      |
|      |             |                                   |     |       |      |
|      |             |                                   |     |       |      |
|      |             |                                   |     |       |      |

"L" = Hot wire
"N" = Neutral wire

"E" = Ground wire