
# Assembly Instructions: 1405-BA3 (Travers)

#### IMPORTANT:

- ALL INSTALLATION WORK SHOULD BE DONE BY ACCREDITED PROFESSIONAL.
- SHUT OFF POWER SUPPLY AT FUSE OR CIRCUIT BREAKER!
- USE ONLY THE SPECIFIED BULBS. DO NOT EXCEED THE MAXIMUM WATTAGE!

For Customer Service, please contact the place of purchase.

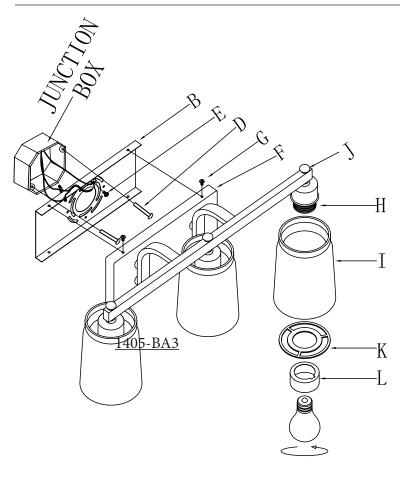

How to Identify the Fixture's Wires		
<u>Hot</u>	Neutral	Ground
Smooth	Ribbed	Bare Metal, Green, or Green Inner Thread
Black	White	
Black Inner Thread	White Inner Thread	
House Wires Hot Neutral Ground Ground		

#### **CONNECTING THE WIRES**

4. Have an assistant support the fixture's weight while completing the wiring. Refer to the wiring diagram and attach the fixture's wires to the power supply wires from the junction box. Connect Hot to Hot, Neutral to Neutral, and Ground to Ground. Twist the ends of the wire pairs together, and then twist on a wire connector. Make sure all twists are in the same direction. If there is no house ground wire coming from the junction box, locate ground screw (E) on the mounting bracket/mounting strap and wrap the fixture's ground wire around the ground screw. Use a screwdriver to tighten the top of ground screw (E) onto the wires and into the mounting bracket/mounting strap. Tuck the wires into the junction box.

#### FINISHING THE INSTALLATION

5. Place backplate (F) over mounting strap (B) so that the holes in mounting strap (B) match the holes in the backplate. Thread screws (G) into backplate (F) and mounting strap (B). Twist until backplate (F) is snug against the wall.

**Note:** Complete the remaining steps *after* the fixture has been hung.

6. Carefully push glass shade (I) over socket (H). Secure the glass in place with spider (K) and socket cover (L). Repeat until all glass shades are hung. Install light bulb (not provided) in accordance with the fixture's specifications. Do not exceed the maximum recommended wattage.

Your installation is now complete. Turn on the power and test the fixture.

### PREPARING FOR INSTALLATION

Remove all of the contents from the carton. See the important notes above. Remove the old fixture from the wall including the old mounting strap.

- 1. Take the mounting strap assembly from the parts bag. Mounting strap (B) contains several threaded holes. Line up the holes in canopy (F) with the holes in mounting strap (B). Please test the backplate against the mounting strap to ensure that it is straight.
- 2. Holding mounting strap (B) up to the junction box, pull the house wires through the center of mounting strap (B).
- 3. Secure mounting strap (B) to the junction box with mounting screws (D) and a screwdriver. Tighten the screws securely.

## **CLEANING TIPS**

Treat the fixture gently! Regular cleaning will reduce the need for deep cleaning. For regular cleaning, turn off the light and wipe down the fixture with a clean lint-free cotton or microfiber cloth. Never spray cleaner directly onto the fixture.

