

**DTV Mode**<sup>™</sup> Dual-outlet shower interface w/eco-mode diverter K-29202-E

## Features

- Integrated push-button diverter provides simple, intuitive control of two shower outlets.
- Sleek, minimalist design.
- Easy-to-use temperature dial control.
- Suitable for dual shower applications.
- Duration/countdown timer feature.
- Digital thermostatic valve technology guarantees accurate and safe temperature control.
- Adjustable high-temperature limit for added safety.
- Eco mode can save water and help meet CALGreen requirements by allowing only one water outlet to function at a time.
- Compatible with the KOHLER Mode app featuring Bluetooth® wireless technology to provide remote on/off capability and UI 1951 setting adjustments.

## Installation

• Wall-mount.

## **Required Products/Accessories**

K-528-PM Two-port digital thermostatic valve

#### **Recommended Products/Accessories** K-23723 Faucet cleaner

### Included Components

Additional Components: Mounting hardware RJ11 Cable extension 20 ft **RJ11** Coupler Removal tool



### **Codes/Standards**

CSA C22.2 No. 14 CSA C22.2 No. 68

## **KOHLER®** Electronic Faucets, Valves, and Controls Five-Year Limited Warranty

See website for detailed warranty information.

The BLUETOOTH® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Kohler Co. is under license. Other trademarks and trade names are those of their respective owners

# **Available Colors/Finishes**

Color tiles intended for reference only.

#### **Color Code Description**




CP **Polished Chrome** 

BL Matte Black





Dual-outlet shower interface w/eco-mode diverter K-29202-E

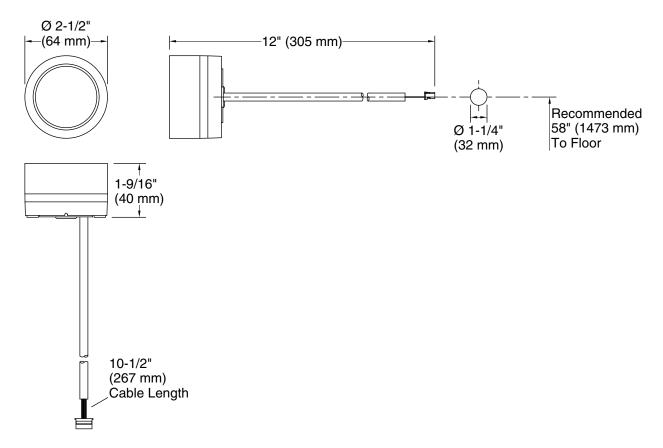

## **Technical Information**

All product dimensions are nominal. Drain included: No Bluetooth® range: 32 ft (0.8 m) Bluetooth® version: 4.1 Max. Ambient temp: 140°F (60°C) 86°F (30°C) Min. Operating temp: Max. Operating 120°F (48.9°C) temp: Max. Relative 100% humidity condensing:

#### Notes

Install this product according to the installation instructions.

