Ceiling LED Pendant

START FROM HERE

- Make sure **POWER** is **COMPLETELY OFF** at the fuse box
- Have your fixture installed by a qualified licensed electrician
- · Prepare everything in a clear area
- Wear gloves at all times during this installation
- · Read instructions carefully before you start assembly
- Keep this installation sheet for future reference


Technical Support: 1-855-855-8926

Please Note:

- This Kuzco LED fixture comes with pre-wired LED module(s)
- Unless instructed, Do Not touch any part of the LED module(s) as any unnecessary contact with the module could cause permanent damage
- For dimming, an ELV (Electronic Low Voltage) or TRIAC type of dimmer is required
- 120V input

1. Remove fixture from its original package

- **2.** Separate mounting plate (1c) from canopy (2a) by removing canopy screws (2f) with allen key
- **3.** Attach mounting plate (1c) to electrical junction box (1a) using junction box screws provided (1e) in hardware package
- **4.** Secure mounting plate (1c) to mounting surface with screws (1g) and anchors (1f)
- **5.** To change fixture height, push and hold wire gripper (2g), slide wire to desired length and then release wire gripper (2g) to secure (Remove excess wire if necessary)
- **f.** Make proper electrical connections (**black** to **hot** "L", **white** to **neutral** "N", **ground** to "**GND**") with wire nuts (**1b**) provided in hardware package and place driver (**4a**) inside canopy (**2a**)
- **1.** Attach canopy **(2a)** to mounting plate **(1c)** with canopy screws **(2f)** and allen key
- **8.** Fine tone wire length if necessary, by push and hold wire gripper (2g) and then adjust wire to desired length
- **9.** Position inner lights (3a) into desired position

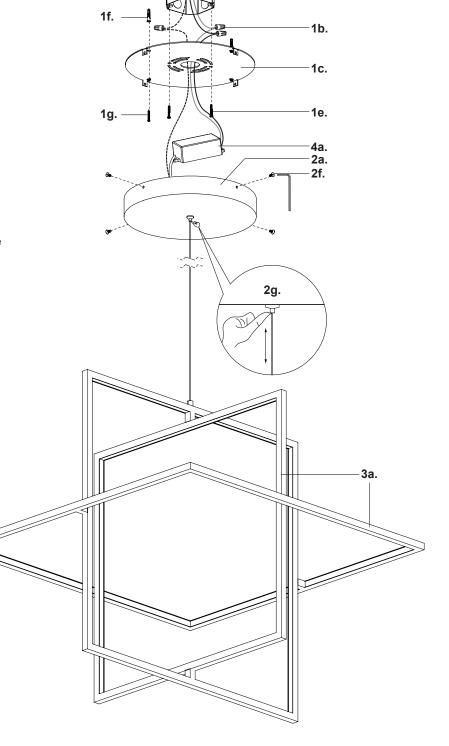

19054 28th Avenue Surrey, BC Canada V3Z 6M3 T: 604 538 7162 TF: 1-855 85 KUZCO F: 604 538 7196 W: kuzcolighting.com 20210512