

Please go to www.quoizel.com for product cleaning tips. Go to the **Care + Maintenance** selection.

Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.

Light Source: (3) G9 Clear Xenon Bulbs 60W Maximum, bulbs not included.

Estimated Assembly Time: 20-30 minutes

Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact your original place of purchase.

⚠ Warnings and Cautions


Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.

These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation.


Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.

Do not touch the bulb with bare hands use a cloth or glove.

Package Contents

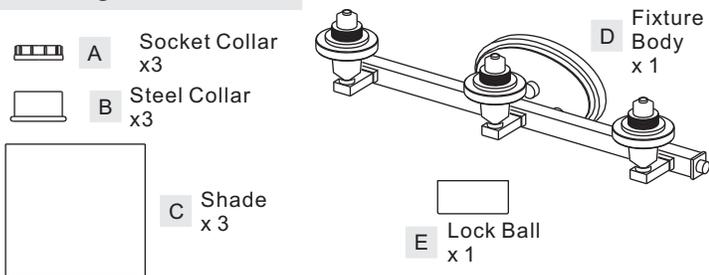

Hardware Contents

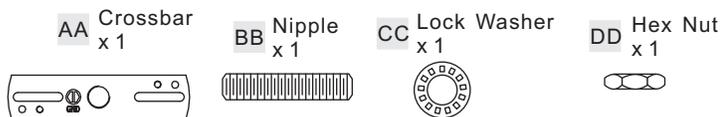

STEP 1 – Install Crossbar and Nipple

A. Secure the Crossbar (AA) to the Outlet Box with Outlet Box Screws. Tighten until snug.

* Pliers is required on this step.

B. Thread the Hex Nut (DD) onto one end of the Nipple (BB). Place the Lock Washer (CC) over the Hex Nut end of the Nipple (BB) and then thread the Nipple (BB) into the center lock hole of the Crossbar (AA). Using pliers, thread the Hex Nut (DD) against the Crossbar (AA) and hand tighten until snug.

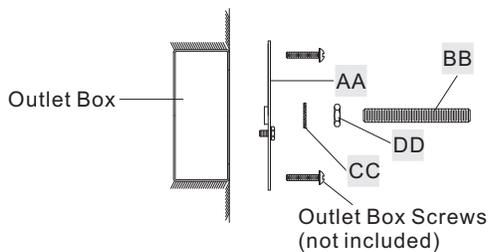


Figure 1

STEP 2 – Fit Fixture Body to Crossbar Assembly

A. Fit the Fixture Body (D) over the Nipple (BB) on the Crossbar (AA) and secure with the Lock Ball (E). The Backplate of the Fixture Body (D) should be snug against the wall and the Lock Ball (E). If not, adjust the length of the Nipple (BB) on the Crossbar (AA) by unscrewing the Hex Nut (DD) and the Lock Washer (CC) and then screwing the Nipple (BB) in or out of the Crossbar (AA) until the correct length is achieved. Once the backplate of Fixture Body (D) is secure, remove the Lock Ball (E) and Fixture Body (D) and proceed to step 3.

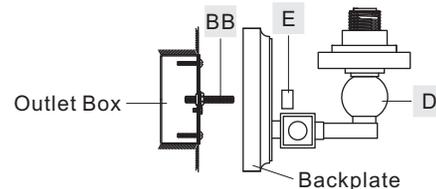


Figure 2

STEP 3 - Wire Connections

A. Wrap bare or green ground wire around green ground screw on the crossbar, no less than 2 inches from the end of the wire. Tighten the green ground screw.

B. Use standard wire connectors (not included) to make all wire connections. Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.


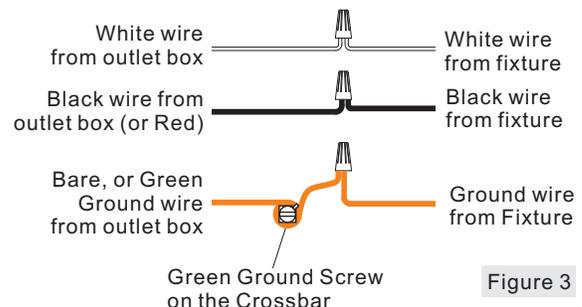


Figure 3

STEP 4 - Install Fixture Body


A. Carefully tuck all wires into the outlet box and position the backplate of the Fixture Body (D) over the outlet box. Attach the backplate of the Fixture Body (D) over the Nipple (BB) and secure with the Lock ball (E). Hand tighten until snug.

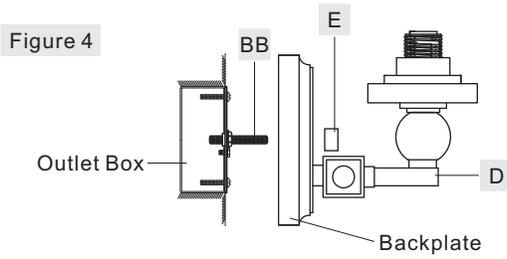

STEP 5 - Install Shade and Bulb

A. Place the Shade (C) and the Steel Collar (B) over the Socket as shown. Secure by threading the Socket Collar (A) onto the Socket. Hand tighten until snug.
B. Insert bulbs into sockets and push snugly into properly.

Your fixture is now assembled and ready to use. Enjoy!


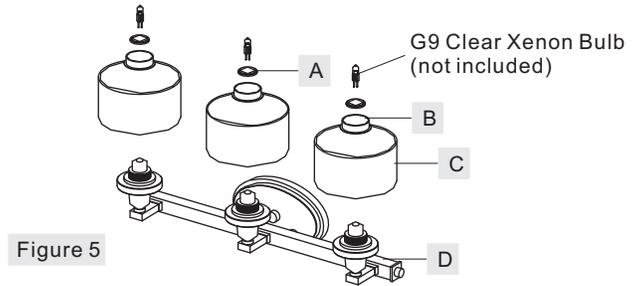


CAUTION FOR BULB REPLACING

- A. When replace bulb, turn off power and allow lamp to cool. For safety purpose, wear gloves and eye protection.
- B. If bulb is scratched or cracked, DO NOT use the lamp to avoid breakage during use or installation.
- C. Use only in fixtures rated for lamps wattage and voltage.
- D. Lamp operate under high pressure generating intense heat. Prevent contact with liquid and combustible materials.

DW8603C

FINISH: POLISHED CHROME

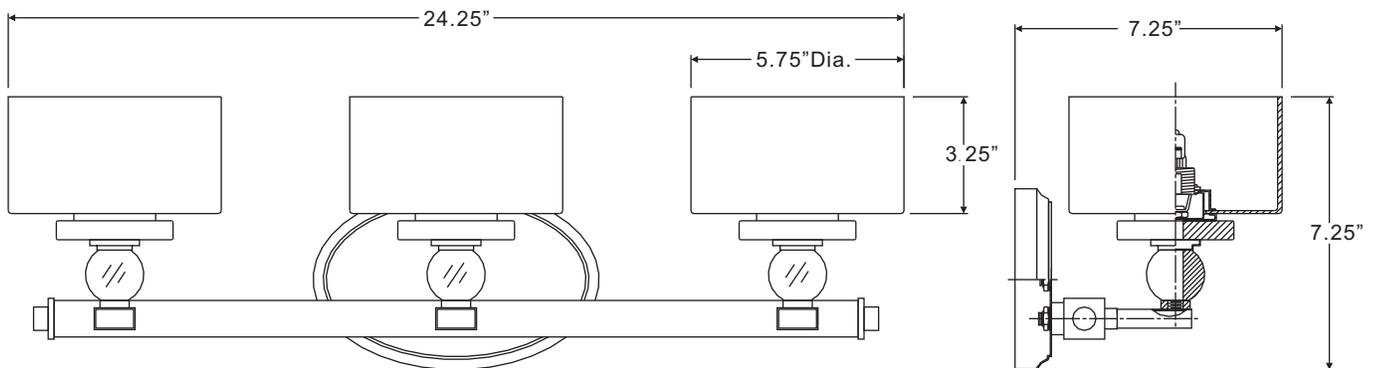

NOTE: ALL DIMENSIONS ARE ROUNDED UP TO THE NEAREST 1/4"