


PALOMA - model: LED522

W Track System Luminaires

WAC LIGHTING

Responsible Lighting®

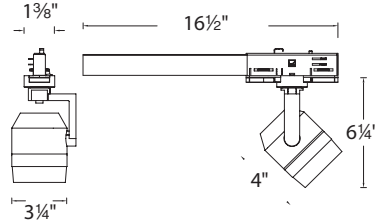

Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

Museum-quality LED luminaire with high performance reflector optics.

FEATURES

- Accommodates 1 filter lens or 1 accessory
- 365° horizontal rotation and 180° vertical aiming
- Integral selector to choose between independently controllable track circuits
- 50,000 hour rated life
- 5 year WAC Lighting product warranty
- Recessed driver hidden within W track

SPECIFICATIONS

Construction: Die-cast aluminum with cap ring. Clear glass lens included.

Finish: Available in black (BK), white (WT), or platinum (PT) powder coat finishes.

Aiming: 365° horizontal rotation and 180° vertical aiming. Spring lock to secure the aiming adjustment on horizontal.

Lamp: Available in Bridgelux LED.

Dimming: Dim to 10% with electronic low voltage (ELV) dimmer (120V only)

Standards: ETL & cETL listed

FIXTURE PERFORMANCE

Model #	Beam	Color Temp	Watts	Lumens	CBCP	CRI	Model #	Beam	Color Temp	Watts	Lumens	CBCP	CRI
WTK-LED522S-927	19°	2700K	22W	1325	6352	90	WTK-LED522S-930	19°	3000K	22W	1375	6590	90
WTK-LED522N-927	24°			1301	4940		WTK-LED522N-930	24°			1350	5125	
WTK-LED522F-927	36°			1355	3374		WTK-LED522F-930	36°			1695	3500	
WTK-LED522S-27	19°	2700K	22W	1590	7622	85	WTK-LED522S-30	19°	3000K	22W	1655	7940	85
WTK-LED522N-27	24°			1650	5928		WTK-LED522N-30	24°			1625	6177	
WTK-LED522F-27	36°			1630	4048		WTK-LED522F-30	36°			1695	4218	
WTK-LED522S-35	19°	3500K	22W	1705	8180	85	WTK-LED522S-40	19°	4000K	22W	1720	8257	85
WTK-LED522N-35	24°			1675	6362		WTK-LED522N-40	24°			1690	6422	
WTK-LED522F-35	36°			1745	4345		WTK-LED522F-40	36°			1765	4385	


ORDER NUMBER

TrackType	System	Model#	Beam	Color Temp	Finish
W Track	WTK 120V WHK 277V	LED522	S 19°	927 2700K (90 CRI) 27 2700K	BK Black PT Platinum WT White
			N 24°	930 3000K (90 CRI) 30 3000K	
			F 36°	35 3500K 40 4000K	

LENSES AND ACCESSORIES

Description	Model	Finish	Description	Model
Color Lens	LENS-20	AMB Amber BLU Blue GRN Green RED Red YEL Yellow	Frosted Lens	LENS-20-FR
			Spread Lens	LENS-20-SPR
			Beam Elongating	LENS-20-BEL
			Honeycomb Louver	LENS-20-HCL

FINISHES



Example: WTK-LED522N-40-BK

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760


PALOMA - model: LED522

Photometrics


WAC LIGHTING

Responsible Lighting®


19° Beam Angle - 3000K

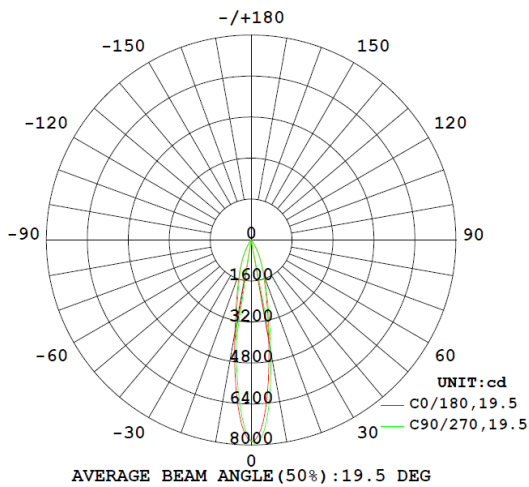

24° Beam Angle - 3000K

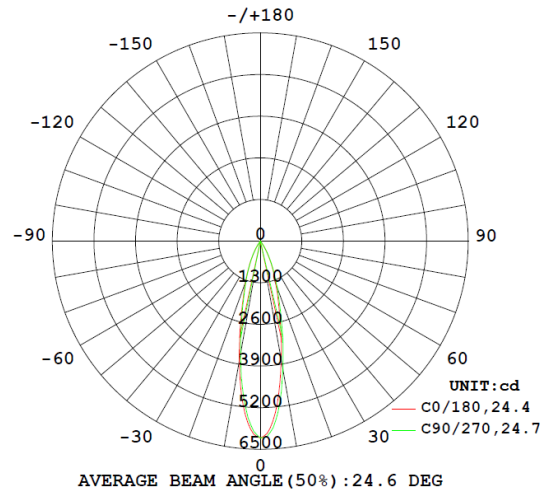

36° Beam Angle - 3000K

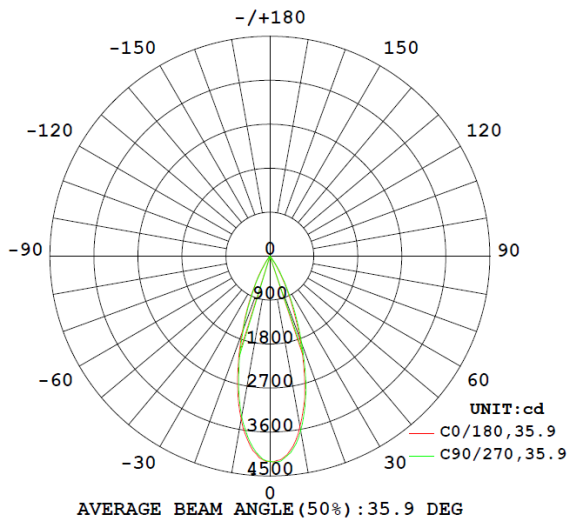

waclighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760